

الرافعات الشخصية المتنقلة ACCESS PLATFORMS DIVISION



www.mister-machine.com







التفاصيل

Contact Details (Bahrain)	4	أرقام الإتصال (مملكة البحرين)
Location Maps - Ras Zuwayed (Bahrain)	5	خريطة الموقع - راس زويد (البحرين)
Articulated Boom Lifts - Diesel	6	رافعات سلة مفصلية - ديزل
Articulated Boom Lifts - Hybrid	12	رافعات سلة مفصلية - هجين
Telescopic Boom Lifts - Diesel	16	رافعات أشخاص تلسكوبية - ديـزل
Scissor Lifts - Electric	22	رافعات أشخاص مقصية - كهربائية
Scissor Lifts - Diesel	26	رافعات مقصية - ديزل
Notes	30	ملاحظات
Contact Details (Saudi Arabia)	31	أرقام الإتصال (المملكة العربية السعودية)
Location Maps (Saudi Arabia)	31	خريطة الموقع (المملكة العربية السعودية)



KINGDOM OF BAHRAIN

CONTACT DETAILS

ACCESS PLATFORMS

+973-17708177, 17705052

FORKLIFTS

+973-17708177, 17708170

GENERATORS AND COMPRESSORS

+973-17708160, 17705059

HEAVY EQUIPMENTS

+973-17708177, 17705052

LIGHT EQUIPMENTS

+973-17705058, 17240166, 17345020

FORMWORK AND SCAFFOLDING

+973-17708168

PORTABLE CABINS

+973-17708168

RAW MATERIALS

+973-17705085, 17708173

SKIPS

+973-17705061, 39797404

TRANSPORTATION AND LOGISTICS

+973-17705069

QUALITY USED EQUIPMENTS FOR SALE

+973 39757554, 17708173, +966 55 8884575

مملكة البحرين

بيانات الاتصال

الرافعات الشخصية المتنقلة

الرافعات الشبوكية

+ 90" 100.0100, 100.010.

المولدات الكهربائية والضواغط

+97817771770009

المعدات الثقيلة

+977177.177,177.000

المعدات الخفيفة

القوالب والسقالات

+974 וווי או

كبائن متنقلة

+977177

المواد الخام

+977177000001777

حاويات الأنقاض

+974 177 - 129 - 1294

النقليات والخدمات اللوجستية

+9771770079

بيع المعدات المستعملة الممتازة

BAHRAIN BRANCHES

Maameer

Tel: +973 17708160, 17708168

Fax: +97317700086

Location: Bldg. 541, Rd.3417 Blk. 634, Maameer Industrial Area

GPS Map: 26.1267, 50.6050

Manama

Tel: +973 17240166

Location: Shop 313, R. 336, Bll. 311, Manama


GPS Map: 26.2226, 50.5711

Ras Zuwayed

973 1770 8040

Tel: +973 17705070, +973 17708177 Location: Bldg. 49, Ave. 52, Blk. 952, Ras Zuwayed

GPS Map: 26.0792, 50.6238

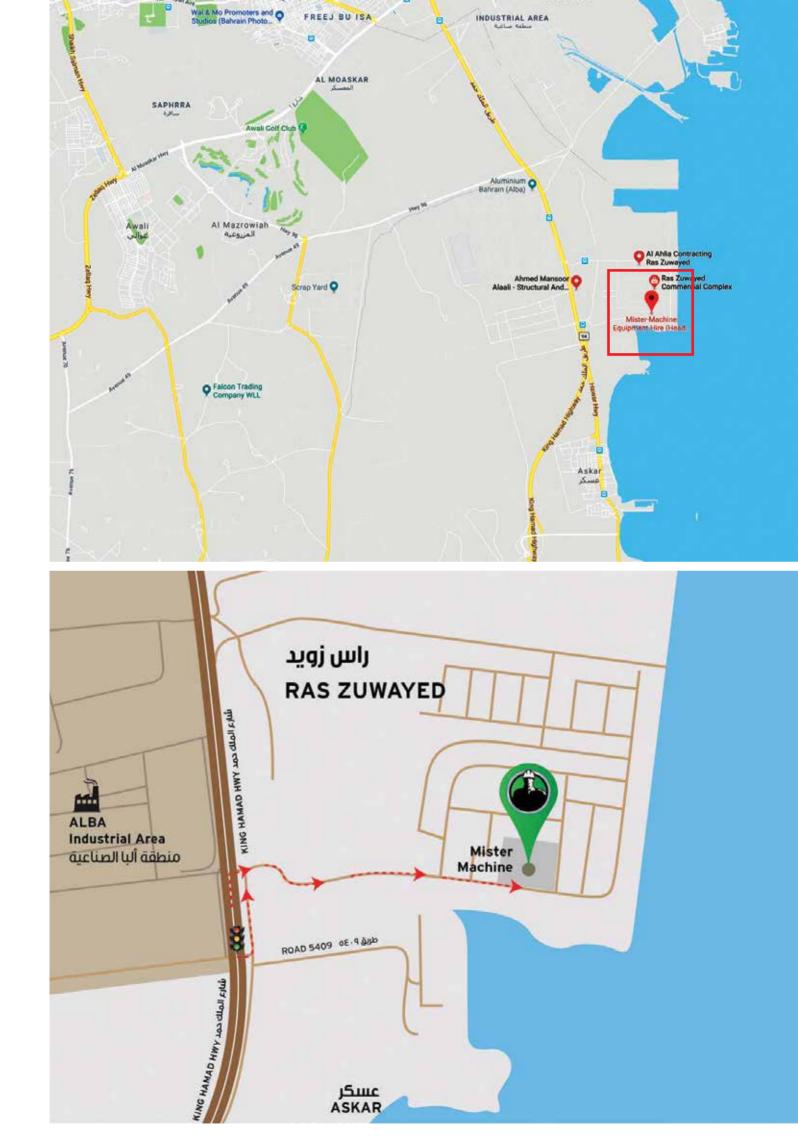

Articulating Boom Lift - Diesel

رافعات سلة مفصلية - ديزل

MISTER MACHINE®

- **Quality Equipment Hire:** Hiring the best performance, most reliable access platforms at competitive hire rates. All our boom lifts are the latest models.
- Articulated Boom Lifts (Man Lifts): Give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and larger work envelopes provide you with access to those hard-to-reach places.

Access Platform Type	Articulating Boom Lift 227Kg,Work Height 16.1M With Jib	Articulating Boom Lift 227Kg,Work Height 20.4M With Jib
Maker / Model	Genie Z45/25J RT (4x4)	Genie Z60/34 (4x4) IC
Working Height	16.07 m (52 ft 2 in)	20.39 m (66 ft 4 in)
Platform Height	14.07 m (46 ft 2 in)	18.39 m (60 ft 4 in)
Horizontal reach maximum	7.65 m (25 ft 1 in)	11.05 m (36 ft 3 in)
Up-and-over clearance maximum	7.16 m (23 ft 6 in)	8.23 m (27 ft)
Platform Length	0.76 m (2 ft 6 in)	0.91 m (3 ft)
Platform Width	1.83 m (6 ft)	2.44 m (8 ft)
Height - Stowed	2.11 m (6 ft 11 in)	2.69 m (8 ft 10 in)
Length - Stowed	6.83 m (22 ft 5 in)	8.15 m (26 ft 9 in)
Overall Width	2.29 m (7 ft 6 in)	2.46 m (8 ft 1 in)
P	RODUCTIVITY	
Platform capacity	227 kg	227 kg
Platform occupancy	2 Person	2 Person
Platform rotation	160 degrees	180 degrees
Vertical jib rotation	135 degrees	90 degrees
Drive Speed - Stowed	8.0 km/h	4.8 km/h
Drive Speed - Raised	1.1 km/h	1.1 km/h
Gradeability - Stowed	45 %	40 %
Turning Radius - Inside	1.70 m	3.04 m
Turning Radius - Outside	4.5 m	6.07 m
POWER & WEIGHT		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	64.4 L	75 lit
Gross Weight	6,924 kg	11,231 kg
CERTIFICATION		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170

email: sales@mister-machine.com - website: www.mister-machine.com







- All our access platforms have foam filled tyres for safety.
- Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.



Articulating Boom Lifts - Diesel

رافعات سلة مفصلية - ديزل

MISTER MACHINE®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at competitive hire rates. All our boom lifts are the latest models.
- Articulated Boom Lifts (Man Lifts): give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and larger work envelopes provide you with access to those hard-to-reach places.

Access Platform Name	Articulating Boom Lift 227kg, Work Height 25.6m with Jib	
Maker / Model	Genie Z80/60 (4x4)	
Working Height	25.77 m (84 ft)	
Platform Height	23.77 m (78 ft)	
Horizontal reach maximum	18.29 m (60 ft)	
Up-and-over clearance maximum	8.83 m (29 ft)	
Platform Length	0.91 m (3 ft)	
Platform Width	2.44 m (8 ft)	
Height - Stowed	3.0 m (9 ft 10 in)	
Length - Stowed	11.27 m (37 ft)	
Overall Width	2.49 m (8 ft 2 in)	
PRODUCTI	VITY	
Platform capacity	227 kg	
Platform occupancy	2 Person	
Platform rotation	160 degrees	
Vertical jib rotation	135 degrees	
Drive Speed - Stowed	4.83 km/h	
Drive Speed - Raised	1.1 km/h	
Gradeability - Stowed	45 %	
Turning Radius - Inside	4.42 m	
Turning Radius - Outside	7.47 m	
POWER & WEIGHT		
Engine Type	Diesel engine	
Fuel Tank Capacity	132 L	
Gross Weight	16,284 kg	
CERTIFICA	TION	
Certification Co.	Bureau Veritas / TUV	

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







- All our access platforms have foam filled tyres for safety.
- Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.



Articulated Boom Lifts - Diesel

رافعات سلة مفصلية - ديزل

MISTER MACHINE ®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- Articulated boom lifts (Man Lifts): Give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and Larger work envelopes provide you with access to those hard-to-reach places.

Access Platform Name		Articulating Boom Lift: 272kg, Work Ht 43.1m with Jib	
Maker / Model		Genie ZX-135/70 (4x4)	
Working Height			43.15 m (141 ft)
Platform Height			41.15 m (135 ft)
Horizontal reach maximum	1	Riser extended	18.03 m (59 ft 2 in)
110112011tai reacii illaxiilluli		Riser retracted	21.26 m (69 ft 9 in)
		Riser extended	23.01 m (75 ft 6 in)
Up-and-over clearance max	ximum	Riser retracted	9.91 m (32 ft 6 in)
Platform Length			0.91 m (3 ft)
Platform Width			2.44 m (8 ft)
Height - Stowed			3.09 m (10 ft 2 in)
Length - Stowed			12.93 m (42 ft 5 in)
Overall Width	Axle extended		3.94 m (12 ft 11 in)
Overall width	Axle retracted		2.49 m (8 ft 2 in)
		PRODUCTIVITY	
Platform capacity			272 kg
Platform occupancy		2 Person	
Platform rotation		160 degrees	
Vertical jib rotation		110 degrees	
Drive Speed - Stowed		4.8 km/h	
Drive Speed - Raised		1.1 km/h	
Gradeability - Stowed			45 %
Inside turning radius:	Axle extended		2.9 m
inside turning radius.	Axle retracted		8.03 m
Outside turning radius	Axle extended		6.17 m
Outside turning radius:	Outside turning radius: Axle retracted		9.96 m
POWER & WEIGHT			
Engine Type		Diesel engine	
Fuel Tank Capacity		151.4 L	
Gross Weight		21,092 kg	
CERTIFICATION			
Certification Co.			Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







NOTES:

- All our access platforms have foam filled tyres for safety.
- Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.
- Keywords: Hire, Hiring, Rent, Rental, Renting, Sale, Selling, Access Platforms, Access Machines, Cherry pickers, Man Lifts, lifter, Aerial work platforms, Articulated boom lifts, articulating manlift, Middle East, GCC, Bahrain, Saudi Arabia, Eastern Province, Al Khobar, Al Thuqba Industrial Area.

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com



Articulated Boom Lifts - Hybrid

رافعات سلة مفصلية - هجين

MISTER MACHINE ®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- Articulated boom lifts (Man Lifts): Give you the extra reach you need to work over and around obstacles on the job site. They offer exceptional outreach, versatile performance and Larger work envelopes provide you with access to those hard-to-reach places.
- **Hybrid Technology**: Give you the choice of diesel engine supported by the machine's battery pack for when extra power is needed or electric-only mode allows zero-emission operation, making it ideal for indoor use, or for quiet, clean operation.

Access Platform Name	Articulating Boom Lift: Hybrid, 225kg, Work 17.2m, Jib	Articulating Boom Lift: Hybrid, 225kg, Work 20.8m, Jib
Maker / Model	Nifty HR17 (4x4)	Nifty HR21 (4x4)
Working Height	17.2 m (56 ft 6 in)	20.8 m (68 ft 6 in)
Platform Height	15.2 m (50 ft)	18.8 m (62 ft)
Horizontal outreach	9.4 m (31 ft)	12.8 m (42 ft)
Platform Length	0.85 m (2 ft 9 in)	0.85 m (2 ft 9 in)
Platform Width	1.8 m (5 ft 11 in)	1.8 m (5 ft 11 in)
Height - Stowed	2.1 m (6 ft 11 in)	2.15 m (7 ft)
Length - Transport	4.8 m (15 ft 9 in)	5.3 m (17 ft 5 in)
Length - Travel	6.35 m (20 ft 10 in)	6.7 m (22 ft)
Overall Width	2.0 m (6 ft 7 in)	2.27 m (7 ft 5 in)
	PRODUCTIVITY	
Platform capacity	225 kg	225 kg
Platform occupancy	2 Person	2 Person
Platform rotation	180 degrees	100 degrees
Vertical jib rotation	150 degrees	150 degrees
Drive Speed - Stowed	6.0 km/h	4.5 km/h
Drive Speed - Raised	km/h	km/h
Gradeability - Stowed	45 % (24 degrees)	40 % (22 degrees)
Turning Radius - Outside	3.7 m (12 ft 2 in)	4.0 m (13 ft)
POWER & WEIGHT		
Engine Type	Hybrid - Battery & Diesel	Hybrid - Battery & Diesel
Fuel Tank Capacity		
Gross Weight	5,000 kg	6,660 kg
	CERTIFICATION	
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170

email: sales@mister-machine.com - website: www.mister-machine.com









NOTES:

All our access platforms have foam filled tyres for safety.

Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.

 Keywords: Hire, Hiring, Rent, Rental, Renting, Sale, Selling, Access Platforms, Access Machines, Cherry pickers, Man Lifts, lifter, Aerial work platforms, Articulated boom lifts, articulating Manlifts, Hybrid Man Lift, electric Boom Lift, Middle East, GCC, Bahrain, Saudi Arabia, Eastern Province, Al Khobar, Al Thuqba Industrial Area.

13

MACLINE

Access Platforms

Articulated Boom Lifts - Hybrid

رافعات سلة مفصلية - هجين

MISTER MACHINE ®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- Articulated boom lifts (Man Lifts): Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Hybrid Technology**: Give you the choice of diesel engine supported by the machine's battery pack for when extra power is needed or electric-only mode allows zero-emission operation, making it ideal for indoor use, or for quiet, clean operation.

Access Platform Name	Articulating Boom Lift: Hybrid, 280kg, Work 28m, Jib	
Maker / Model	Nifty HR28 (4x4)	
Working Height	28.0 m (92 ft)	
Platform Height	26.0 m (85 ft 6 in)	
Horizontal outreach	19.0 m (62 ft)	
Platform Length	0.9 m (2 ft 11 in)	
Platform Width	2.4 m (7 ft 10 in)	
Height - Stowed	2.7 m (8 ft 10 in)	
Length - Transport	7.3m (23ft 11in)	
Length - Travel	9.28 m (30 ft 5 in)	
Overall Width	2.49 m (8 ft 2 in)	
PRODUC	CTIVITY	
Platform capacity	280 kg	
Platform occupancy	2 Person	
Platform rotation	180 degrees	
Vertical jib rotation	150 degrees	
Drive Speed - Stowed	4.7 km/h	
Drive Speed - Raised	km/h	
Gradeability - Stowed	40 % (22 degrees)	
Turning Radius - Outside	5.9 m (19 ft 4 in)	
POWER & WEIGHT		
Engine Type	Hybrid - Battery & Diesel	
Fuel Tank Capacity		
Gross Weight	14,650 kg	
CERTIFI		
Certification Co.	Bureau Veritas / TUV	

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







NOTES:

All our access platforms have foam filled tyres for safety.

Our access platforms are built to meet the highest standards of safety, reliability and are in excellent working conditions with Certified Performance.

• Keywords: Hire, Hiring, Rent, Rental, Renting, Sale, Selling, Access Platforms, Access Machines, Cherry pickers, Man Lifts, lifter, Aerial work platforms, Articulated boom lifts, articulating Manlifts, Hybrid Man Lift, electric Boom Lift, Middle East, GCC, Bahrain, Saudi Arabia, Eastern Province, Al Khobar, Al Thuqba Industrial Area.

15

MAC‡INE

Access Platforms

Telescopic Boom Lifts - Diesel

رافعات أشخاص تلسكوبية - ديزل

MISTER MACHINE®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts:** Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift: 227kg, Work Height 20.3m	Telescopic Boom Lift 227kg, Work Height 21.8m with Jib
Maker / Model	Genie S-60 (4x2)	Genie S-65 (4x4)
Working Height	20.3 m (66 ft)	21.8 m (71 ft)
Platform Height	18.3 m (60 ft)	19.8 m (65 ft)
Horizontal reach maximum	15.48 m (50 ft 10 in)	17.10 m
Platform Length	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)	2.44 m (8 ft)
Height - Stowed	2.72 m (8 ft 11 in)	2.72 m (8 ft 11 in)
Length - Stowed	8.51 m (27 ft 11 in)	9.5 m (31 ft 2 in)
Overall Width	2.49 m (8 ft 2 in)	2.49 m (8 ft 2 in)
F	PRODUCTIVITY	
Platform capacity	227 kg	227 kg
Platform occupancy	2 Person	160 degrees
Platform rotation	160 degrees	135 degrees
Vertical jib rotation	135 degrees	6.4 km/h
Drive Speed - Stowed	6.4 km/h	18 m/min
Drive Speed - Raised	18 m/min	45 %
Gradeability - Stowed	30 %	2.36 m
Turning Radius - Inside	2.36 m	5.72 m
TURNING RADIUS - OUTSIDE		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	132 L	132 L
Gross Weight	9,651 kg	10,445 kg
CERTIFICATION		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.

17

MACLINE

Access Platforms

Telescopic Boom Lifts - Diesel

رافعات أشخاص تلسكوبية- ديزل

MISTER MACHINE®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts**: Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift: 227kg, Work Height 27.9m with Jib	
Maker / Model	Genie S-85 (4x4)	
Working Height	27.9 m (91 ft)	
Platform Height	25.9 m (85 ft)	
Horizontal reach maximum	23.32 m (76 ft 6 in)	
Platform Length	0.91 m (3 ft)	
Platform Width	2.44 m (8 ft)	
Height - Stowed	2.8 m (9 ft 2 in)	
Length - Stowed	12.19 m (40 ft)	
Overall Width	2.49 m (8 ft 2 in)	
PRO	DUCTIVITY	
Platform capacity	227 kg	
Platform occupancy	2 Person	
Platform rotation	160 degrees	
Vertical jib rotation	135 degrees	
Drive Speed - Stowed	5.4 km/h	
Drive Speed - Raised	18 m/min	
Gradeability - Stowed	45 %	
Turning Radius - Inside	3.66 m	
Turning Radius - Outside	6.55 m	
POWER & WEIGHT		
Engine Type	Diesel engine	
Fuel Tank Capacity	132 L	
Gross Weight	17,237 kg	
CERTIFICATION		
Certification Co.	Bureau Veritas / TUV	

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







SAFETY NOTES:

- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.

19

mster

MAC‡INE

Access Platforms

Telescopic Boom Lifts - Diesel

<u>ارافعات</u> أشخاص تلسكوبية - ديزل

MISTER MACHINE®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Telescopic boom lifts:** Give you the ability to safely work at very high attitude quickly and efficiently which saves time and money. Our Man Lifts take you right where you need to work while providing you with the capacity and height you need. Telescopic boom lifts are ideal for work that requires maximum vertical and horizontal outreach.

Access Platform Name	Telescopic Boom Lift 340kg, Work Height 32.5m	Telescopic Boom Lift 227kg, Work Height 40.2m with Jib
Maker / Model	Genie S-100 (4x4)	Genie S-125 (4x4)
Working Height	32.48 m (106 ft)	40.15 m (131 ft 2 in)
Platform Height	30.48 m (100 ft)	38.15 m (125 ft 2 in)
Horizontal reach maximum	22.86 m (75 ft)	24.38 m (80 ft)
Platform Length	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width	2.44 m (8 ft)	2.44 m (8 ft)
Height - Stowed	3.07 m (10 ft 1 in)	3.07 m (10 ft 1 in)
Length - Stowed	13.00 m (42 ft 8 in)	14.25 m (46 ft 9 in)
Overall Width: Axle retracted	2.49 m (8 ft 2 in)	2.49 m (8 ft 2 in)
Overall Width: Axle extended	3.35 m (11 ft)	3.35 m (11 ft)
	PRODUCTIVITY	
Platform capacity	340 kg	227 kg
Platform occupancy	2 Person	2 Person
Platform rotation	160 degrees	160 degrees
Vertical jib rotation	Not applicable	135 degrees
Drive Speed - Stowed	4.8 km/h	4.8 km/h
Drive Speed - Raised	18 m/min	18 m/min
Gradeability - Stowed	40 %	40 %
Turning Radius - axles extended: Inside	2.74 m	2.59 m
Turning Radius - axles extended: Outside	6.05 m	5.74 m
POWER & WEIGHT		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	151 L	151 L
Gross Weight	18,008 kg	20,248 kg
CERTIFICATION		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com







- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



Scissor Lifts - Electric

رافعات أشخاص مقصية - كهربائية

MISTER MACHINE ®

- **Quality Equipment Hire**: Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- **Battery powered scissor lifts:** These machines are Low level, lightweight, compact and are fitted with non marking tyres which makes them ideal for working inside workhouses and confined spaces. This machine offers the capacity to lift upto 2 operators and are used for Cleaning, Electrical, Facilities management, Heating, ventilating & air conditioning, Mechanical engineering, Warehousing.

Access Platform Name	Scissor Lift, Battery: 227kg, Width 81cm, Work Height 9.92m	Scissor Lift, Battery: 454kg, Width 1.17m, Work Height 9.92m	
Maker / Model	Genie GS-2632	Genie GS-2646	
Working Height	9.92 m (32 ft)	9.92 m (32 ft)	
Platform Height: maximum	7.92 m (26 ft)	7.92 m (26 ft)	
Platform Height: stowed	1.16 m (3 ft 9.5 in)	1.16 m (3 ft 9.6 in)	
Platform Length: outside	2.26 m (7 ft 5 in)	2.26 m (7 ft 5 in)	
Platform Length: extended	3.18 m (10 ft 5 in)	3.18 m (10 ft 5 in)	
Slide-out platform extension deck	91 cm (3 ft)	91 cm (3 ft)	
Platform Width: outside	81 cm (2 ft 8 in)	1.15 m (3 ft 9.3 in)	
Height - Stowed	2.26 m (7 ft 5 in)	2.26 m (7 ft 5 in)	
Height - Stowed: rails lowered	1.91 m (6 ft 3 in)	1.91 m (6 ft 3 in)	
Length - Stowed	2.44 m (8 ft)	2.44 m (8 ft)	
Overall Width	81 cm (2 ft 8 in)	1.17 m (3 ft 10 in)	
	PRODUCTIVITY		
Maximum Number of Platform Occupants (indoor/outdoor)	2 Persons	2 Persons	
Working Height	227 kg	454 kg	
Platform Height: maximum	Full height	Full height	
Platform Height: stowed	3.5 km/h	3.5 km/h	
Platform Length: outside	0.8 km/h (13 m/minute)	0.8 km/h (13 m/minute)	
Platform Length: extended	25 %	30 %	
Slide-out platform extension deck	Zero	Zero	
Platform Width: outside	2.13 m	2.29 m	
POWER & WEIGHT			
Engine Type	24 V DC		
Fuel Tank Capacity	Four 6V 225 Ah batteries	Four 6V 225 Ah batteries	
Gross Weight	1,959 kg	2,412 kg	
CERTIFICATION			
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV	

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com











- All Our Access Platforms Have Foam Filled Tyres For Safety.
- · Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



Scissor Lifts - Electric

رافعات أشخاص مقصية - كهربائية

MISTER MACHINE ®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at competitive hire rates. All our boom lifts are the latest models.
- Battery Powered Scissor Lifts: These machines are low level, lightweight, compact and are fitted with non marking tyres which makes them ideal for working inside workhouses and confined spaces. This machine offers the capacity to lift upto 3 operators and are used for cleaning, electrical, facilities management, heating, ventilating & air conditioning, mechanical engineering, warehousing.

Access Platform Name	Scissor Lift, Bat: 318kg, Width 1.17m, Work Ht.11.75m	Scissor Lift, Battery: 350kg, Width 1.19m, Work Height 13.93m
Maker / Model	Genie GS-3246	Genie GS-4047
Working Height	11.75 m (38 ft)	13.93 m (45 ft 1.5 in)
Platform Height: maximum	9.75 m (32 ft)	11.93 m (39 ft 1.5 in)
Platform Height: stowed	1.29 m (4 ft 2.75 in)	1.34 m (4 ft 5 in)
Platform Length: outside	2.26 m (7 ft 5 in)	2.26 m (7 ft 5 in)
Platform Length: extended	3.18 m (10 ft 5 in)	3.18 m (10 ft 5 in)
Slide-out platform extension deck	91 cm (3 ft)	91 cm (3 ft)
Platform Width: outside	1.15 m (3 ft 9.3 in)	1.15 m (3 ft 9.3 in)
Height - Stowed	2.39 m (7 ft 10 in)	2.54 m (8 ft 4 in)
Height - Stowed: rails lowered	1.8 m (5 ft 11 in)	1.88 m (6 ft 2 in)
Length - Stowed	2.44 m (8 ft)	2.44 m (8 ft)
Overall Width	1.17 m (3 ft 10 in)	1.19 m (3 ft 11 in)
	PRODUCTIVITY	
Maximum Number of Platform Occupants	2	3 Persons
Working Height	318 kg	350 kg
Platform Height: maximum	Full height	Full height
Platform Height: stowed	3.5 km/h	3.1 km/h
Platform Length: outside	0.8 km/h (13 m/minute)	0.8 km/h (13 m/minute)
Platform Length: extended	25 %	25 %
Slide-out platform extension deck	Zero	Zero
Platform Width: outside	2.29 m	2.3 m
POWER & WEIGHT		
Engine Type	Batteries 24 V	24 V DC, 300 Ah
Fuel Tank Capacity	Four 6V 225 Ah batteries	Four 12V 150 Ah batteries
Gross Weight	3,221 kg	3,221 kg
CERTIFICATION		
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170

email: sales@mister-machine.com - website: www.mister-machine.com









- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



رافعات مقصية **Scissor Lifts**

Scissor Lifts - Diesel

رافعات مقصية - ديزل

MISTER MACHINE ®

- Quality Equipment Hire: Hiring the best performance, most reliable Access Platforms at Competitive Hire Rates. All our boom lifts are the latest models.
- Diesel engine powered scissor lifts: Are chosen for applications that require more workspace and more lifting capacities and are ideal for outdoor construction or maintenance tasks. They deliver exceptional gradeability, making these easier to maneuver through rough terrain job sites.

Access Platform Name	Rough-Terrain Scissor Lift: 680Kg, Work Height 9.9M	Scissor Lift, Diesel: 454kg, Work Height 11.9m
Maker / Model	Genie GS-2669 RT	Genie GS-3369 RT
Working Height	9.9 m (32 ft)	11.96 m (39 ft)
Platform Height: maximum	7.9 m (26 ft)	9.96 m (32 ft 8 in)
Platform Height: stowed	1.47 m (4 ft 10 in)	1.47 m (4 ft 10 in)
Platform Length: outside	2.79 m (9 ft 2 in)	2.79 m (9 ft 2 in)
Platform Length: extended	3.71 m (12 ft 2 in)	3.71 m (12 ft 2 in)
Slide-out platform extension deck	0.91 m (3 ft)	0.91 m (3 ft)
Platform Width: outside	1.6 m (5 ft 3 in)	1.6 m (5 ft 3 in)
Height - Stowed	2.59 m (8 ft 6 in)	2.59 m (8 ft 6 in)
Height - Stowed: rails lowered	1.92 m (6 ft 4 in)	1.92 m (6 ft 4 in)
Length - Stowed	3.12 m (10 ft 3 in)	3.12 m (10 ft 3 in)
Overall Width	1.75 m (5 ft 9 in)	1.75 m (5 ft 9 in)
	PRODUCTIVITY	
Platform occupancy (indoor/ outdoor)	4/ 4 Persons	4/ 2 Persons
Platform capacity	680 kg	454 kg
Drive Height	Full height	Full height
Drive Speed - Stowed	5.6 km/h	5.6 km/h
Drive Speed - Raised	0.5 km/h	0.5 km/h
Gradeability - Stowed	40 %	35 %
Turning Radius - Inside	2.11 m	2.11 m
Turning Radius - Outside	4.6 m	4.6 m
POWER & WEIGHT		
Engine Type	Diesel engine	Diesel engine
Fuel Tank Capacity	38 L	38 L
Gross Weight	3,701 kg	3,882 kg
	CERTIFICATION	
Certification Co.	Bureau Veritas / TUV	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170

email: sales@mister-machine.com - website: www.mister-machine.com



رافعات مقصیة Scissor Lifts







- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



رافعات مقصیة Scissor Lifts

Scissor Lifts - Diesel

رافعات مقصية - ديزل

MISTER MACHINE ®

- **Quality Equipment Hire:** Hiring the best performance, most reliable Access Platforms at competitive hire rates. All our boom lifts are the latest models.
- **Diesel Engine Powered Scissor Lifts**: Are chosen for applications that require more workspace and more lifting capacities and are ideal for outdoor construction or maintenance tasks. They deliver exceptional gradeability, making these easier to maneuver through rough terrain job sites.

Access Platform Name	Rough-Terrain Scissor Lift: 680kg, Work Height 18.1m
Maker / Model	Genie GS-5390 RT
Working Height	18.15 m (59 ft)
Platform Height: maximum	16.15 m (53 ft)
Platform Height: stowed	2.02 m
Platform Length: outside	3.98 m (13 ft 5 in)
Platform Length: extended	5.34 m (17 ft 6 in)
Slide-out platform extension deck	1.52 m (5 ft)
Platform Width: outside	1.83 m (6 ft)
Height - Stowed	3.15 m (10 ft 4 in)
Height - Stowed: rails lowered	2.47 m (8 ft 1 in)
Length - Stowed	4.88 m (16 ft)
Overall Width	2.29 m (7 ft 6 in)
PRODU	CTIVITY
Maximum Number of Platform Occupants	4 Persons
Platform capacity	680 kg
Drive Height	9.14 m (30 ft)
Drive Speed - Stowed	8.0 km/h
Drive Speed - Raised	1.1 km/h
Gradeability - Stowed	40 %
Turning Radius - Inside	2.16 m
Turning Radius - Outside	5.33 m
POWER & WEIGHT	
Engine Type	Diesel engine
Fuel Tank Capacity	113.6 L
Gross Weight	8,002 kg
CERTIF	ICATION
Certification Co.	Bureau Veritas / TUV

Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com



رافعات مقصیة Scissor Lifts







- All Our Access Platforms Have Foam Filled Tyres For Safety.
- Our Access Platforms are built to meet the highest standards of safety and reliability and are in excellent working conditions with Certified Performance.



ملاحظات NOTES





Please call: +973 1770 8177, 1770 8170 email: sales@mister-machine.com - website: www.mister-machine.com



KINGDOM OF SAUDI ARABIA

المملكة العربية السعودية

CONTACT DETAILS

ACCESS PLATFORMS

055 733 3875, 053 533 3045

FORKLIFTS

055 733 3875, 050 079 3332

GENERATORS AND COMPRESSORS

055 733 3875, 050 079 3332

HEAVY EQUIPMENTS

053 533 3045

TRANSPORTATION AND LOGISTICS

053 533 3045

QUALITY USED EQUIPMENT

055 888 4575

الرافعات الشخصية المتنقلة

.OF OFF F.EO - .OO VFF FAVO

الرافعيات الشيوكية

.0. .V9F FFC - .00 VFF FAVo

المولدات الكهربائية والضواغط

.O. .V9 PPPC - .OO VPP PAVO

المعدات الثقيلة

بيانات الاتصال

.OF OFF F.EO

النقليات والخدمات اللوجستية

.07 077 7.80

معدات مستخدمة ممتازة

ονο ΑΛΑ εονο

24 Hours Hotline: 055 878 1119 Email: awal@mister-machine.com Website: www.mister-machine.com

Al Khobar Branch

Tel: 013 808 4412, 013 808 4413 013 808 4415, 013 808 4419 P.O. Box: 8146, Al Khobar 34623

Address

Warehouse, Madar Industrial Area King Khalid Road, Al Khobar, Near Al Thuqba Industrial Area Kingdom of Saudi Arabia GPS Map: 26.2443, 50.2003 الخط الساخن ٢٤ ساعة؛ ١١١٩ ٨٧٨ ٥٥٠

awal@mister-machine.com www.mister-machine.com

فرع الخبر

مالا ۱۸۰۸ ۱۳۵۳ - ۱۳۸۸ ۱۳۸ شاه


ص.ب: ۸۱٤٦, الخبر ۳٤٦٢٣

العنوان

مستودع, منطقة مدار الصناعية طريق الملك خالد, الخبر بالقرب من منطقة الثقبة الصناعية المملكة العربية السعودية

خريطة تحديد الموقع: ٥٠.٢٠٠٣ , ٢٦.٢٤٤٣



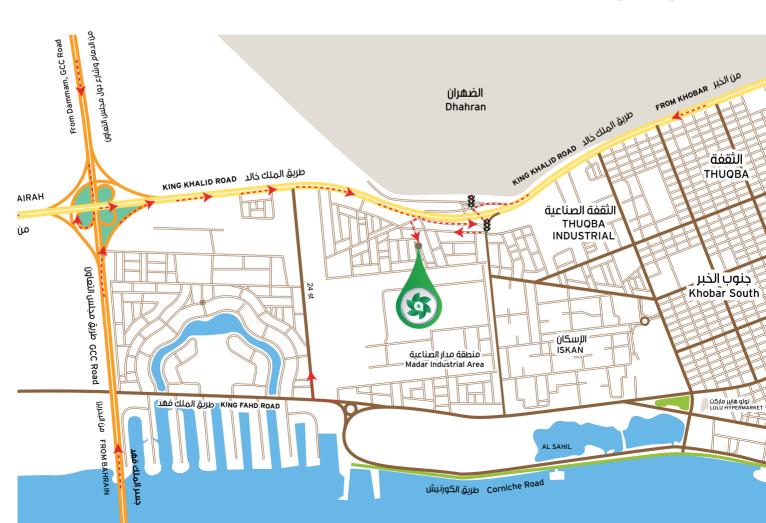

Mister Machine B.S.C.C





+973 1770 8040

مستــر مشـیــن ش.م.ب.م خدمات تأحير متميزة

EQUIPMENT DIVISIONS (BAHRAIN)

ACCESS PLATFORMS

- Articulated Boom Lifts/ Man Lifts
- Telescopic Boom Lifts/ Man Lifts
- Scissor Lifts (Diesel/ Battery)

FORKLIFTS

- Forklifts (Diesel/ Battery/ Lpg)
- Reach Trucks
- Telescopic Handlers (Loadall)

FORMWORKS AND SCAFFOLDING

- Modular Formworks
- H-Beams (Wooden Girders)
- Circular Column Formworks
- Scaffolding Sets, and Jacks (Props)
- Proof Tested Scaffold Boards

GENERATORS AND COMPRESSORS

- Generators (1 Phase/ 3 Phase)
- Air Compressors (Diesel/ Electric)
- Portable Fuel Tanks
- **Lighting Towers**

HEAVY EQUIPMENTS

- Compaction/ Rollers
- Cranes, Truck Cranes
- Earth Moving Equipment
- Trucks and Trailers
- **Tankers**

LIGHT EQUIPMENTS

- Cleaning and Cutting Equipment
- **Electric Power Tools**
- Fixing Tools
- Ladders and Lifting Equipment
- Compactor Plates and Concrete Vibrators
- Painting and Decorating Equipment
- Plumbing Equipment
- Rebar Bending and Cutting Equipment
- Water Pumps and Welding Equipment

PORTABLE CABINS

- Portable Cabins, Guard Rooms
- Portable Toilets

RAW MATERIALS

Sale of Desert Fill, Stones, Sand, and Aggregates

SKIPS

- Skip Bins/ Dumpsters
- Skip Loader Trucks
- Refuse Compactor Truck

TRANSPORTATION AND LOGISTICS

- Transport of Equipment, and General Cargo
- Transport of Raw Materials

QUALITY USED EQUIPMENTS

Sale of Used Power Tools, Generators, Compressors, Forklifts, Heavy Equipment, Skips, etc.

أقسام المعدات (البحرين)

الرافعات الشخصية المتنقلة

- رافعات سلة مفصلية
- رافعات سلة تلسكوبية
- الرافعات المقصية (ديزل/ يطارية)

الرافعات الشوكية

- الرافعات الشوكية (ديزل، بطارية، غاز)
 - رفعات المخازن الشوكية
 - رافعات المناولة التلسكوبية

قوالب الخرسانة والسقالات

- قوالب المقاسات المتعددة
- دعامات الأسقف الخشسة
- القوالب الدائرية أطقم السقالات والدعائم الثابته
 - ألواح/ دوسات خشبية

المولدات والضاغطات

- مولدات كهربائية ا فيز، ٣ فيز
- ضاغطات الهواء "كمبريسرات"
 - خزانات ديزل متنقلة
 - أبراج اللانارة

المعدات الثقيلة

- مداحل الطرق
- الرافعات المتنقلة
- معدات الحفر والنقل الثقيلة
 - - القاطرات والمقطورات
 - الصهاريج

المعدات الخفيفة

- معدات التنظيف، معدات التقطيع
 - المعدات الكهربائية
 - أدوات التصليح
 - السلالم معدات الرفع
- المعدات الداكة وهزازة الكونكريت
 - معدات الصباغة والديكور
 - معدات السياكة
- معدات تقويس وتقطيع حديد التسليح
 - مضخات المياه معدات اللحام

الكبائن متنقلة

- . كياًثن متنقلة، كيائن الحراس
 - مراحيض متنقلة

المواد الخام

بيع الدفان البرى، الصخور، الرمل، الكونكريت

حاويات المخلفات

- حاويات المخلفات
- شاحنات نقل الحاويات
- شاحنات كيس المخلفات

النقليات والخدمات اللوجستية

- نقّل المعدات الثقيلة، وجميعٌ أنواع البضائع
 - نقل الدفان البرى

بيع المعدات المستعملة الممتازة

بيع معدات كهربائية، رافعات شخصية، مولدات کهرباء، کمبریسرات، رافعات شوکیة، معدات ثقيلة، حاويات الأنقاض، إلخ