





شـركـة أوال لتأجير المعدات Awal Equipment Hiring Company

www.mister-machine.com



#### KINGDOM OF SAUDI ARABIA

**EQUIPMENT DIVISIONS** 

**Access Platforms** 

055 733 3875, 055 853 3354

**Generators And Compressors** 

055 733 3875

**Heavy Equipments** 

055 853 3354

**Transportation And Logistics** 

055 853 3354

**Quality Used Equipments:** 

055 888 4575

المملكة العربية السعودية

أقسام المعدات

الرافعات الشخصية المتنقلة

.00 AOF FF0E - .00 VFF FAVo

المولدات الكهربائية والضواغط

.00 ٧٣٣ ٣٨٧0

المعدات الثقيلة

.00 AOF FF0E

النقليات والخدمات اللوحستية

.00 NOT TTOE

معدات مستخدمة ممتازة

ιοο ΛΛΛ εονο

24 Hours Hotline: 055 878 1119 Email: awal@mister-machine.com Website: www.mister-machine.com

Al Khobar Branch

Tel: 013 808 4412, 013 808 4413 013 808 4415, 013 808 4419

P.O. Box: 2485 Al Khobar 31952

**Address** 

Warehouse, Madar Industrial Area, King Khalid Road,

Al Khobar, Kingdom of Saudi Arabia (Near Thugba Industrial Area)

GPS Map: 26.2443214, 50.2003803

الخط الساخن ٢٤ ساعة: ١١١٩ ٨٧٨ ٥٥٠

awal@mister-machine.com www.mister-machine.com

فرع الخبر

هاتف: ۸۰۸ ۱۳۵ م۸۰۸ ۱۳۳ هاتف

18 1. V EE10 - 18 V V EE10

ص.ب: ۲٤٨٥ الخبر ۳۱۹۵۲

العنوان


مستودع، منطقة مدار الصناعية طريق الملك خالد،

الخبر، المملكة العربية السعودية

(قرب منطقة الثقية الصناعية)

خربطة تحديد المواقع: 26.2443214, 50.2003803



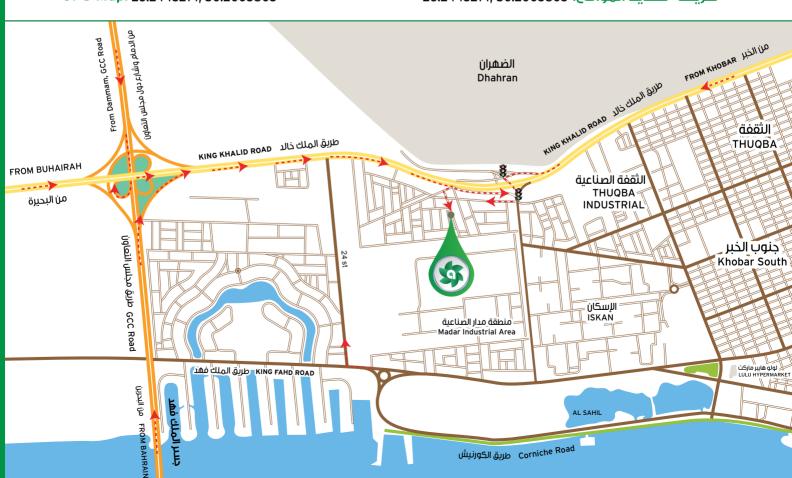



# HEAVY COMPACTION / VIBRATION

1)	VIBRATORY	DOUBLE DRUM	RIDE ON F	ROLLERS	4
2)	HEVIV COL	I COMPACTOR D	OLLEDS		_

### **CRANE DIVISION**

1)	MOBILE HYDRAULIC	CRANES	6
2)	TRUCK MOUNTED CR	ANES	8

## **EARTHMOVING EQUIPMENT**

1) BACKHOE LOADERS / EXCAVATORS	12
2) SKID STEER LOADERS (BOBCATS)	13
3) BULLDOZERS	14
4) MOTOR GRADER	15
5) TRACKED HEAVY EXCAVATORS	16
6) TRACKED MINI EXCAVATORS	17
7) WHEELED LOADERS "SHOVELS" 15, 19 T	ONS 18
8) WHEELED LOADERS "SHOVELS" 23, 28	TONS 20

# TELE SCOPIC HANDLER (LOADALL)

### **FORKLIFTS**

2) REACH STACKERS (ELECTRIC)	23
3) FORKLIFTS (ELECTRIC)	24
4) FORKLIFTS (DIESEL)	26

### **TANKERS**

1) WATER TANKER	32
2) FUEL TANKER	33

### **TRUCKS & TRAILERS**

1)	DUMP TRUCKS	35
2)	TIPPERS	36
3)	CARGO TRUCK	37
۸)	TRAII FRS	40



## öjlالمعدات الداكة / الهزازة COMPACTION / VIBRATION





### VIBRATORY DOUBLE DRUM RIDE ON ROLLERS

رصاصة الاسطوانتين

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Compaction and Vibraratory Equipment, All our Equipment are the latest models.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

EQUIPMENT NAME	Tandem Vibratory Roller- Diesel: 2500kg, 2700kgf	Tandem Vibratory Roller-Diesel: 3150kg, 2700kgf
Maker / Model	Cat CB22	Dynapac CC122
Operating Weight	2,600 kg	2,600 kg
Weight at Front Drum	1,210 kg	1,260 kg
Weight at Rear Drum	1,290 kg	1,340 kg
Overall Length	2,500 mm	2,680 mm
Overall Width	1,100 mm	1,310 mm
Overall Height	2,680 mm	2,640 mm
Maximum Travel Speed	10.5 km/h	10 km/h
Gross Power	24.6 kw (33 hp)	21 kw (28 hp)
Fuel Tank Capacity	56 L	250 L
	COMPACTION	
Compaction width	1,000 mm	1,200 mm
Static Linear Load Front / Rear	12.5 kg/cm	10.5 kg/cm
Nominal Amplitude	0.5 mm	0.5 mm
Vibration frequency (Hz)	63 / 55 Hz	57
Centrifugal Force per Drum	27.6 kN	27 kN
Water (Spray) Tank	160 L	160 L
COMPACTION ROLLER USAGE	Used for the compaction of medium sized sand, gravel and non-cohesive soils. It is also used for medium sized asphalt jobs.	



## المعدات الداكة / الهزازة COMPACTION / VIBRATION





HEAVY COMPACTOR ROLL	_ERS	الرصاصات الثقيلة	
EQUIPMENT NAME		Vibratory Soil Roller-Diesel 10,800kg 25 Tons	
Maker / Model		Dynapac CA250	
Operating Weight		10,800 kg	
Overall Length		5,550 mm	
Overall Width		2,384 mm	
Travel Height		2,952 mm	
Maximum Travel Speed		7.5 km/h	
Gross Power		82 kw (110 hp)	
Fuel Tank Capacity		250 L	
Gross Power		21 kw (28 hp)	
Fuel Tank Capacity		250 L	
	COI	MPACTION	
Static Linear Load		28.2 kg/cm	
Nominal	High	1.7 mm	
Amplitude	Low	0.8 mm	
Vibration frequency (Hz)		33	
Centrifugal	High Amplitude	246 kN	
Force (kN)	Low Amplitude	119 kN	
Drum Mass		6,000 kg	
Drum width		2,384 mm	
USAGE		Used for the compaction of all types of soil.	

#### **IMPORTANT NOTES:**

- Compaction is used to increase the density of materials by two methods:
  - 1. Static force.
  - 2. Vibratory (dynamic force)
- Copaction costs approx. 4% of the total construction cost. It is very important for the quality of the finished structures. It is often ignored which results in cracks & high maintenance costs.
- Compaction depends of the type of soil, moisture (water content), the compaction method & the performance of the compaction / vibration equipment.





### MOBILE HYDRAULIC CRANE

### الرافعات الهيدروليكية المتنـقلة

CRANE GENERAL DATA				
Crane Capacity		60,000 kg at 3.0 m	80,000 kg at 2.5 m	
Crane Maker & Model		Tadano GT-600EX	Tadano GT-800EX	
Crane Type		Hydraulic Truck Crane	Hydraulic Truck Crane	
Overall Length		13 ,170 mm	14,100 mm	
Overall Width		2,820 mm	2,590 mm	
Overall Height (Cra	ane Folded)	3,730 mm	3,630 mm	
Gross Vehicle	Weight	41,500 kg	40,139 Base Machine without CounterWeight	
	Front	16,000 kg	19,795 kg	
	Rear	25,500 kg	20,344 kg	
Additional Counte	rweight	NIL	1000, 1000, 2300, 2400, 2700, 3600, 4900 kg (Total = 17,900 kg)	
Maximum Travelin	g Speed	84 km/h	105.3 km/h	
Vehicle Turning Ra	ndius	11.3 m	12.7 m	
Fuel Tank Capacity	1	300 litres	400 litres	
		CRANE LIFTING CAPACITIES		
Boom Fully Extend	led Length	43.0 m	44.0 m	
Outriggers Fully E	xtended Length	6,800 mm	7,200 mm	
	cities at different radius	60,000 kg at 3.0 m	80,000 kg at 2.5 m	
lengths when the extended	Outriggers are fully	28,700 kg at 6.0 m	41,500 kg at 6.0 m	
For the 80 Ton Cra	ane, the counterweights	16,2800 kg at 9.0 m	26,100 kg at 9.0 m	
must also be fully	installed. Crane is not designed	6,500 kg at 12.0 m	18,700 kg at 12.0 m	
to travel with all th	_	3,000 kg at 16.0 m	11,700 kg at 16.0 m	
installed.		4,400 kg at 20.0 m	7,000 kg at 20.0 m	
		3,000 kg at 24.0 m	5,000 kg at 24.0 m	
		1,700 kg at 30.0 m	3,200 kg at 30.0 m	
		800 kg at 34.0 m	2500 kg at 34.0 m	
		600 kg at 36.0 m	1500 kg at 40.0 m	
First Jib Length & Max Lifting Capaci	ity	8.8 m 4,000 kg	9.9 m 4,500	
Second Jib Length & Max Lifting Capacity		15.2 m 2,600 kg	17.7 m 3,580	
Certification Comp	pany	Bureau Veritas	Bureau Veritas	







TRUCK MOUNTED CRANE (HIAB) 2 ,4 TONS		الرافعات المثبتة على الشاحنات
TRUCK MOUNTED CRANE NAME	2 TONS	4 TONS
Lifting Capacity (Load Moment)		7.7 ton-m
Crane Maker	FASSI	FASSI
Model	F45A-21	F80A-22
Overall Length	6,900 mm	8,500 mm
Overall Width	2,180 mm	2,500 mm
Overall Travel Height (Crane Folded)	2,600 mm	3,100 mm
Gross Vehicle Weight	7,000 kg	11,000 kg
Unlade Weight	3,960 kg	4,530 kg
Payload	3,000 kg	6,000 kg
	TRUCK CAPACITY	
Cargo Bay Length	4,350 mm	5,000 mm
Cargo Bay Width	2,050 mm	2,340 mm
Cargo Bay Height	400 mm	400 mm
CRANE CAPACI	TY (THESE CRANES ARE OF T	HE FULLY FOLDED TYPE)
Maximum Lifting Capacities With	2,000 kg at 2,0m	3,650 kg at 2.0 m
Hydraulic Boom Extensions	1,800 kg at 2,3 m	3,295 kg at 2.25 m
when the Outriggers are Fully Extended	1,190 kg at 3,6 m	2,030 kg at 3.8 m
LAtenueu	870 kg at 4,9 m	1,370 kg at 5.5 m
		1,010 kg at 7.25 m
Certification Company	Bureau Veritas	Bureau Veritas

#### **NOTES:**

- Our Trucks & Cranes are built to meet the highest standards of safety and reliability and are in excellent working conditions.
- All our trucks are fitted with drop sides for the safety of the transported cargos.





TRUCK MOUNTED CRANES (HIAB) 6,7 Tons

الرافعات المثبتة على الشاحنات

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Cranes

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

TRUCK MOUNTED CRANE NAME	6 TONS	7 TONS
Lifting Capacity (Load Moment)	13.4 ton-m	15.3 ton-m
Crane Maker	HIAB	HIAB
Model	144 B-3 CLX	166 B-3 CLX
Semitrailer Overall Length	9,300 mm	9,300 mm
Overall Width	2,600 mm	2,600 mm
Overall Height (Crane Folded)	3,500 mm	3,500 mm
Gross Semitrailer Weight	18,000kg	18,000 kg
Unlade Weight	9,900 kg	10,400 kg
Payload	8,100 kg	7,600 kg
	TRUCK CAPACITY	
Cargo Bay Length	6,100 mm	6,100mm
Cargo Bay Width	2,450 mm	2,450mm
Cargo Bay Height	750 mm	750 mm
CRANE CAPACIT	Y (THESE CRANES ARE OF T	HE FULLY FOLDED TYPE)
Maximum Lifting	4,300 kg at 3.1 m	4,900 kg at 3.1 m
Capacities With	2,900 kg at 4.5 m	3,400 kg at 4.5 m
Hydraulic Boom Extensions when the Outriggers	2,000 kg at 6.3 m	2,300 kg at 6.3 m
are Fully Extended.	1,540 kg at 8.2 m	1,760 kg at 8.2 m
,	1,200 kg at 10.3 m	1,380 kg at 10.3 m
Certification Company	Bureau Veritas	Bureau Veritas

#### **NOTES**

- Our Trucks & Cranes are built to meet the highest standards of safety and reliability and are in excellent working conditions.
- All our trucks are fitted with drop sides for the safety of the transported cargos.



For More Information, call: +966 55 733 3875, +966 55 878 1119 - E-mail: awal@mister-machine.com Visit us at www.mister-machine.com







TRUCK MOUNTED CRANE 10 , 12 TONS		الرافعات المثبتة على الشاحنان
TRUCK MOUNTED CRANE NAME	10 TONS	12 TONS
Lifting Capacity (Load Moment)	20.7 ton-m	24.2 ton-m
Crane Maker	HIAB	HIAB
Model	244 EP-4 CLX	288 EP-4 CLX
Semitrailer Overall Length	10,300 mm	10,300 mm
Overall Width	2,550 mm	2,550 mm
Overall Height (Crane Folded)	3,650 mm	3,650 mm
Gross Semitrailer Weight	28,500kg	33,000kg
Unlade Weight	15,700 kg	15,700 kg
Payload	14,300 kg	14,300 kg
	TRUCK CAPACITY	
Cargo Bay Length	6,450 mm	6,500mm
Cargo Bay Width	2,300 mm	2,450mm
Cargo Bay Height		600 mm
	TRUCK CAPACITY	
Boom fully extended length		
Outriggers fully extended length		
Maximum Lifting	8,400 kg at 2.4m	9,300 kg at 2.5m
Capacities With	4,700 kg at 4.4m	5,500 kg at 4.4m
Hydraulic Boom Extensions when the Outriggers are	3,250 kg at 6.1m	3,850 kg at 6.1m
Fully Extended.	2,380 kg at 8.1m	2,800 kg at 8.1m
	1,820 kg at 10.3m	2,160 kg at 10.3m
	1,460 kg at 12.6m	1,760 kg at 12.6m
Certification Company	Bureau Veritas	Bureau Veritas





#### **SEMITRAILER WITH CRANE 12 TONS**

الرافعات المثبتة على نصف المقطورات

## MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Cranes

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

CEMITRALI ED WITH CRANE NAME	12 TONG		
SEMITRAILER WITH CRANE NAME	12 TONS		
Lifting Capacity (Load Moment)	24.2 ton-m		
Crane Maker	TEREX (ATLAS)		
Model	250CS - 15,7/2 (A16) B3		
Semitrailer Overall Length	13,300 mm		
Overall Width	2,500 mm		
Overall Height (Crane Folded)	3,650 mm		
Gross Semitrailer Weight	40,000kg		
Unlade Weight	15,000 kg		
Payload	25,000 kg		
TRUCK CAPACITY			
Cargo Bay Length	12,230 mm		
Cargo Bay Width	2,400 mm		
Cargo Bay Height	1,000 mm		
CRANE CAPACITY (THESE CRANES	ARE OF THE FULLY FOLDED TYPE.)		
Boom Fully Extended Length			
Outriggers Fully Extended Length			
Maximum Lifting Capacities With	3,000 kg at 6.4 m		
Hydraulic Boom Extensions when the Outriggers are	1,940 kg at 10.2 m		
Fully Extended.	1,450 kg at 12.8 m		
	1,140 kg at 15.5 m		
Certification Company			

#### **NOTES:**

- Our Trailers & Cranes are built to meet the highest standards of safety and reliability and are in excellent working conditions.
- The above trailers are fitted with drop sides for the safety of the transported cargos.



For More Information, call: +966 55 733 3875, +966 55 878 1119 - E-mail: awal@mister-machine.com Visit us at www.mister-machine.com







TELESCOPIC TRUCK CRANE 10 TONS	الرافعات التلسكوبية المثبتة على الشاحنات	
TELESCOPIC TRUCK CRANE NAME	10 TONS	
Lifting Capacity (Load Moment)	31.5 ton-m	
Crane Maker	HIAB	
Model	320 T	
Overall Length	10,300 mm	
Overall Width	2,550 mm	
Overall Travel Height	3,650 mm	
Gross Vehicle Weight	28,500kg	
Unlade Weight	15,700 kg	
Payload	14,300 kg	
TRUCK CAPACITY		
Cargo Bay Length	6,350 mm	
Cargo Bay Width	2,350 mm	
Cargo Bay Height	600 mm	
CRANE CAPACITY (THESE CRANE	S ARE OF THE STRAIGHT BOOM TYPE)	
Boom Fully Extended Length	22.5m	
Outriggers Fully Extended Length	6.4m	
Maximum Lifting Capacities With	10,000 kg at 2.0m	
Hydraulic Boom Extensions when the Outriggers	8,070 kg at 3.11m	
are Fully Extended.	6,280 kg at 5.03m	
	3,170 kg at 8.72m	
	2,150 kg at 12.32m	
	1,550 kg at 15.92m	
	1,200 kg at 19.6m	
Certification Company	Bureau Veritas	



### **BACKHOE EXCAVATOR / LOADER**

الغرافة الحفارة

## MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Backhoe Loaders, All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

BACKHOE EXCAVATOR TYPE	STANDARD BACKHOE	SMALL BACKHOE	
Maker / Model	(JCB 3CX)	(JCB 1CX)	
Total Travel Length	5,620 mm	3,400 mm	
Overall Width	2,350 mm	1,580 mm	
Travel Height	3,530 mm	2,210 mm	
Operational Weight	7,370 kg	2,790 kg	
Maximum Travel Speed	36 km/h	km/h	
Backhoe Maximum Dig Depth	4,240 mm	2,550 mm	
Gross Power	67.5kW (90 hp)	37.3kW (50 hp)	
Fuel Tank Capacity	160 Ltr.	45 Ltr.	
	FRONT SHOVEL		
Front Shovel Capacity	1.1 cu.meters	0.28 cu.meters	
Front Shovel Width	2,350 mm	1,580 mm	
Dumping Height (50 Degree Dump)	4,240 mm	2,100 mm	
BACKHOE: CHOICE OF 4 BACKHOE BUCKETS ARE AVAILABLE			
Very Narrow Bucket	305 mm / 0.06 m3	mm / 0.0 m3	
Narrow Bucket	400 mm / 0.09 m3		
Standard Bucket	610 mm / 0.17 m3		
Wide Bucket	800 mm / 0.24 m3		
EXTRA ATTACHMENT - BACKHOE ROCK-BREAKER			
Working Weight	410 kg		

#### **NOTES:**

- Most of pur backhoe Loaders are fitted with turbo engines, smooth ride systems to improve performance.
- · All our Backhoes are fitted with airconditioning to improve the operator comfort and work output.



For More Information, call: +966 55 733 3875, +966 55 878 1119 - E-mail: awal@mister-machine.com Visit us at www.mister-machine.com

## معدات الحفر والنقل الثقيــلة EARTH MOVING EQUIPMENT





### SKID STEER LOADERS (BOBCATS)

غرافة محورية

#### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Skid Steer Loaders, All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

SKID STEER LOADER "BOBCAT"	STANDARD BOBCAT		
Overall Length	3105 mm		
Overall Width	1398 mm		
Overall Height (With Bucket Lowered)	1930 mm		
Overall Height (With Bucket Raised)	3535 mm		
Dump Height	2148mm		
Loadover Height	2771 mm		
Operating Weight	2167 kg		
ENGINE & TRAVEL SPEED			
Engine Rated Power	32 kW (43.5 hp)		
Fuel Tank	53 litres		
Travel Speed	10.6 km/h		
CAPACITIES			
Rated Operating Capacity	650 kg		
Load	1300 kg		
EXTRA ATTACHMENT: PALLET FORKS			
Forks Length	1220mm		
Lifting Capacity	1000kg		
Maximum Lift Height	2771mm		

#### **NOTES:**

- These machines are for small earthmoving jobs. They are most suitable in small congested areas as they can turn on their own axis.
- Our skid steer loaders are built to meet the highest standards of safety and reliability and are in excellent working conditions.





BULLDOZERS			الجرافات
OPERATING W	EIGHT	40,000 kg	48,800 kg
Dozer Maker / Model		KOMATSU D155A-2	CATERPILLAR D9R
Engine Flywheel Power		320 hp (239 kW)	405 hp (302 kW)
Total Transport Length w	vith Ripper	6880 mm	8,214 mm
Overall Width with the Do	ozer Blade	4130 mm	4,310 mm
Overall Height		3690 mm	3,998 mm
Travel Speed	Forward	11.8 km/h	11.9 km/h
	Reverse	13.7 km/h	14.7 km/h
Fuel Tank Capacity		600 Liters	889 Liters
		UNDERCARRIAGE	
Track Shoes		Reinforced single-grouzer Shoe	Extreme Service
Grouzer Height		80 mm	84 mm
Shoe Width		560 mm	685 mm
DOZER BLADE			
Dozer Blade Type		Semi-Universal Blade	Semi-Universal Blade
Blade Capacity		9.4 cu.m	13.5 cu.m
Blade Length		4,130 mm	4,310 mm
Blade Height		1,790 mm	1,934 mm
Digging Depth		560 mm	606 mm
EXTRA ATTACHMENT: GIANT RIPPER ASSEMBLY			
Туре		Single Shank Variable Paral- lelogram	Single Shank Adjustable Paral- lelogram
Maximum Lift above grou	und	965 mm	882 mm
Maximum Digging Depth		1,240 mm	1,231 mm

**NOTES:** • Our Dozers are fitted with Airconditioning to improve the Operator Comfort and work output.









#### **MOTOR GRADER**

## MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Motor Grader,
  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

OPERATING WEIGHT		40,000 kg	
Grader Maker / Model		KOMATSU GD661A-1	
Engine Flywheel Power		180 hp (134 kW)	
Total Transport Length		8380 mm + Ripper?	
Overall Width		4300 mm	
Overall Height		3120 mm	
Fuel Tank Capacity	Forward	45.0 km/h	
	Reverse	54.8 km/h	
Fuel Tank Capacity		285 Liters	
Tires & Rims	Front	2 x 14-24 12PR Tubed L3 & 8" Rim	
Rear		4 x 14-24 12PR Tubed L3 & 8" Rim	
	BLADE		
Moldboard		Box-section	
Blade Length		4300 mm (14')	
Blade Height		645 mm	
Maximum Lift Above Ground		450 mm	
Maximum Drop Below Ground		535 mm	
Maximum Shoulder Reach	Left	2030 mm	
	Right	2030 mm	
Maximum Bank Cutting Angle		90 degrees	
Cutting Angle		29 - 77 degrees	
EXTRA ATTACH	HMENT: 2 X F	RIPPER SHANK ASSEMBLY	
Maximum Lift Above ground			
Maximum Digging Depth			

**NOTES:** Our Graders are fitted with airconditioning to improve the operator comfort and work output.





## TRACKED HEAVY EXCAVATORS - 22 TONS الحفارات المجنزرة الثقيــلة

OPERATING WEIGHT		21,500 kg	21,500 kg	
Excavator Maker / Mod	del	DOOSAN DX225LCA	Hyundai Robex 220LC-9H	
Engine Flywheel Powe	r	155 hp (116 kW)	148 hp (110 kW)	
Maximum Dig Depth		6,620mm	6,730mm	
Track Width		600 mm	600 mm	
Overall Transport Leng	jth	9,485 mm	9,530 mm	
Overall Width		2,990 mm	2,990 mm	
Transport Height		3,050 mm	3,030 mm	
Travel Speed		5.5 km/hr	5.5 km/hr	
Fuel Tank Capacity		400 Liters	400 Liters	
Fuel Tank Capacity		400 Liters	400 Liters	
EXCAVATOR BUC	KET: CHOICE	OF 2 BUCKETS ARE AVAILA	BLE FOR EACH EXCAVATOR	
Standard Bucket	Width with side cutters	1,236 mm	1,270 mm	
	Capacity	0.92 m3	0.92 m3	
Narrow Bucket	Width with side cutters	772mm	820 mm	
	Capacity	0.50 m3	0.51 m3	
	EXTRA ATTACHMENT: ROCK-BREAKER			
Working Weight		1625 kg		
Chisel Steel Diameter		138 mm		
Impact Energy		4748 Joules		
Blow Rate per minute		370-550 bpm		
NOTE		Breaker is for Heavy Rock-Breaking jobs.		

**NOTES:** All our Excavators are fitted with Airconditioning to improve the Operator Comfort and work output.







### TRACKED MINI EXCAVATORS

الحفارات المجنزرة الصغيرة

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Mini Excavators, All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

OPERATING W	EIGHT	1,740 kg	3,770 kg	5,320 kg	
Excavator Maker /	Model	YANMAR VIO17	YANMAR VIO35-5	YANMAR VIO55-5	
Engine Output Pow	er	13.5 HP (9.9 kW)	28 HP (20.6 kW)	38.7 HP (28.5 kW)	
Maximum Dig Dept	h	2,310 mm	3,300 mm	4,160 mm	
Undercarriage Trac	k Type	Rubber Track	Steel Track	Steel Track	
Track Width		950 / 1,250 mm	1,550 mm	1,990 mm	
Total Transport Ler	ngth	3,450 mm	4,610 mm	5,560 mm	
Height		2,300 mm	2,510 mm	2,620 mm	
Travel Speed	Travel Speed		4.6 km/h	4.4 km/h	
Fuel Tank Capacity		20 Liters	42 Liters	64 Liters	
EXCAVATOR BUCKET					
Standard	Width	450 mm	590 mm	700 mm	
Bucket	Capacity	0.05 m3 (50 Liters)	0.11 m3 (110 Liters)	0.16 m3 (160 Liters)	
	Extra Attachment: Rock-Breaker				
Operating 112		112 kg	160 kg	280 kg	
Chisel Steel Diamet	Steel Diameter 45 mm 52 mm 68 mm		68 mm		
Blow Rate per minu	r minute 600 to 1500 bpm 850 to 1200 bpm 500 to 11		500 to 1100 bpm		
NOTE		Breaker is for Mini Rock-Breaking jobs.			



### WHEELED LOADERS "SHOVELS" - 15, 19 TONS

الغرافة (الشيول)

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Wheeled Loaders, All our Machines are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

OPERATING WEIGHT	15,500 KG	19,000 KG	
Maker / Model	CATERPILLAR 938G-II	KOMATSU WA420-3	
Nett Engine Power	160 hp (119 kW)	220 hp (164 kW)	
Fuel Tank Capacity	247 Ltr.	340 Ltr.	
Dumping height (45 degree dump)	2,771 mm	3,000 mm	
Maximum Breakout Force	123 kN	182.7 kN	
Static Tipping Load (Straight)		13,995 kg	
Static Tipping Load at full turn	10,200 kg	12,180 kg	
Travel Speed	5.5 km/hr	5.5 km/hr	
Fuel Tank Capacity	400 Liters	400 Liters	
DIMENTIONS & WEIGHT			
Total Travel Length	7,501 mm	8,255 mm	
Overall Width	2,780 mm	3,070 mm	
Travel Height	3,356 mm	3,445 mm	
Travel Speed	39 km/h	34.5 km/h	
SHOVEL (BUCKET)			
Shovel Capacity	3.7 cu.yards	4.6 cu.yards	
	2.8 cu.meters	3.5 cu.meters	

#### NOTES

All our Wheeled Loaders are fitted with Airconditioning to improve the Operator Comfort and work output.



## الغـــرافــة ( الشـــيول ) "WHEELED LOADERS "SHOVELS





#### WHEELED LOADERS

الغرافة (الشيول)

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Wheeled Loaders, All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

OPERATING WEIGHT	22,610 KG	30,000 KG	
Maker / Model	DOOSAN MEGA 400V	VOLVO	
Nett Engine Power	276 hp (206 kW)	318 hp (234 kW)	
Fuel Tank Capacity	365 Ltr.	335 Ltr.	
Dumping Height (45 Degree Dump)	2,985 mm		
Maximum Breakout Force	216 kN		
Static Tipping Load (Straight)	18,180 kg		
DIMENSIONS & WEIGHT			
Total Travel Length	8,600 mm		
Overall Width	3,280 mm		
Travel Height	3,556 mm		
Travel Speed	42 km/h		
SHOVEL (BUCKET)			
Shovel Capacity	5.1 cu.yards		
	3.9 cu.meters		

## الغـــرافــة ( الـشـــيـول ) WHEELED LOADERS "SHOVELS"

### WHEELED LOADERS "SHOVELS" - 23, 28 TONS

الغرافة (الشيول)

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Wheeled Loaders, All our Machines are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

OPERATING WEIGHT	22,610 KG	27,650 KG	
Maker / Model	DOOSAN MEGA 400V	VOLVO L180F	
Nett Engine Power	276 hp (206 kW)	318 hp (234 kW)	
Fuel Tank Capacity	365 Ltr.	335 Ltr.	
Dumping height (45 degree dump)	2,985 mm	2,950 mm	
Maximum Breakout Force	216 kN	214.7 kN	
Static Tipping Load, Straight	18,180 kg	20,900 kg	
Static Tipping Load at full turn	15,880 kg	18,260 kg	
DIMENTIONS & WEIGHT			
Total Travel Length	8,600 mm	9,030 mm	
Overall Width	3,280 mm	3230 mm	
Travel Height	3,556 mm	3,580 mm	
Travel Speed	42 km/h	36.1 km/h	
SHOVEL (BUCKET)			
Shovel Capacity	5.1 cu.yards	6.0 cu. yd3	
S. S. Sapucity	3.9 m3	4.6 m3	

#### **NOTES:**

All our Wheeled Loaders are fitted with Airconditioning to improve the Operator Comfort and work output.



## الرافعــات التلســكوبيــة (TELESCOPIC HANDLER (LOADALL





#### TELESCOPIC HANDLER (LOADALL)

الرافعات التلسكوبية

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Telescopic Handlers (Loadalls), All our Telescopic Handlers are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- EXTRA: Highly All our Telescopic Handlers are fitted with Air Conditioning. This is to improve the Operator's Comfort and the Quality of the work output.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

TELESCOPIC HANDLER SIZE	3.5 TONS WITH 12.5 M LIFT HEIGHT	4.0 TONS WITH 16.7 M LIFT HEIGHT
Maker / Model	(JCB Loadall 535-125)	(JCB Loadall 540-170)
Overall Length to front carriage	5,840 mm	6,360 mm
Overall Width	2,350 mm	2,440 mm
Travel Height (folded)	2,590 mm	2,690 mm
Operational Weight	9,140 kg	12,160 kg
Maximum Travel Speed	25 km/h	25 km/h
Gross Power	62.0 kW (82.5 HP)	76.1 kW (102 HP)
Fuel Tank Capacity	125 litres	125 litres
LIFT PERFORMANCE WITH STABILISERS EXTENDED:		

 Maximum lift capacity
 3,500 kg
 4,000 kg

 Lift capacity to full height
 3,200 kg to 12.5m
 2,500 kg to 16.7 m

 Lift capacity at full reach
 1,200 kg at 8.0 m
 600 kg at 12.5 m

 Lift height
 12.3 m
 16.7m

 Maximum forward reach
 8.0 m
 12.5 m

#### **ATTACHMENTS:**

FORKS			
Forks Length	1100mm	1100mm	
Maximum Forks Spacing	1,100	1,100	
FORNT SHOVEL			
Front Shovel Capacity	1.0 cu. m	1.0 cu. m	
Front Shovel Width	2350 mm	2350 mm	
MAN BASKET (EXTRA)			
Dimentions (LxWxH)	1100 x 1100 x1800 mm	1100 x 1100 x1800 mm	
CRANE HOOK (EXTRA)			
Maximum Lift Capcity	3500 kg	4000 kg	



## الرافعات التلسكوبية المحورية TELESCOPIC HANDLER (ROTATING)



### TELESCOPIC HANDLER (ROTATING)

الرافعات التلسكوبية المحورية

TELESCOPIC HANDLER SIZE	5.0 TONS WITH 21.9 M LIFT HEIGHT
Maker / Model	(Genie Rotating GTH-5022 R)
Overall Length to front carriage	7,700 mm
Overall Width	2,490 mm
Travel Height (folded)	3,050 mm
Operational Weight	19,250 kg
Maximum Travel Speed	30 km/h
Gross Power	116.5 kW (156 HP)
Fuel Tank Capacity	125 litres

#### LIFT PERFORMANCE WITH STABILISERS EXTENDED

Maximum lift capacity	5,000 kg
Lift capacity at full height	2,500 kg at 21.9 m
Lift capacity at full reach	400 kg at 18.93 m
Lift height	21.93m
Maximum forward reach	18.93 m

#### **ATTACHMENTS**

FORKS		
Forks Length	1200mm	
Maximum Forks Spacing	1,100	
FORNT SHOVEL		
Front shovel capacity	1.0 cu. m	
Front shovel width	2350 mm	
ROTATING & EXTENDABLE MAN-PLATFORM (EXTRA)		
Dimentions (LxW)	2300 x 1000 mm	
Platform Lift Capacity	200 kg (suitable for 2 person)	
HYDRAULIC CRANE WINCH (EXTRA)		
Maximum Lift Capcity	3000 kg	



## الرافعـات الشـــوكية FORKLIFTS









### REACH STACKERS (ELECTRIC)

### رفعات المخازن الشوكية الكهربائية

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Forklifts

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

REACH TRUCK SIZE	1.0 TONNES	1.4 TONNES	2.0 TONNES
Mast Type	2 Stage View Mast	3 Stage Full Free lift (Container Stuffer)	3 Stage Full Free Lift (Container Stuffer)
Rated Lift Capacity with Side Shift Attachment	1,000 kg at 500mm Load Centre	1,400 kg at 600mm Load Centre	2,000 kg at 600mm Load Centre
Maximum Lift Height	3,300 mm	4,300 mm	4,300 mm
	DIME	NSIONS & WEIGHT	
Overall Length	1200 mm	1,145 mm	1,250 mm
Overall Width	800 mm	1,250 mm	1,250 mm
Overall Lowered Height	2750 mm	1,995 mm	1,995 mm
Overall Extended Height with Backrest Extension	3730 mm	5,150 mm	5,150 mm
Unladen Weight	800 kg	2,610 kg	3,300 kg
	EN	IGINE & SPEED	
Power Type	Battery	Battery	Battery
Battery Capacity	24V / A	48V / 360 A	48V / 420 A
Maximum Travel Speed	Walk Behind	10 km/h	10 km/h
	FORKS		
Forks Length	1150 mm	920 mm	920 mm
Minimum Fork Spacing	570 mm	220 mm	220 mm
Maximum Fork Spacing		850 mm	850 mm
Forks Length		920 mm	1,070 mm
Minimum Fork Spacing		220 mm	245 mm
Maximum Fork Spacing		850 mm	820 mm



## الرافعـات الشــوكية FORKLIFTS



### FORKLIFT (ELECTRIC)

### الرفعات الشوكية الكهربائية

ELECTRIC FORKLIFT SIZE	<b>2.0 TONNES</b> Single Front Tyres	<b>3.0 TONNES</b> Single Front Tyres	
Mast Type	3 Stage Full Free Lift (Container Stuffer)	3 Stage Full Free Lift (Container Stuffer)	
Rated Lift Capacity with Side Shift Attachment	2,000 kg at 500mm load centre	2,400 kg at 500mm load centre	
Maximum Lift Height	5,500 mm	5,000 mm	
	DIMENSIONS & WEIG	НТ	
Overall Length	2,240 mm	2,490 mm	
Overall Width	1,160 mm	1,240 mm	
Overall lowered height	2,375 mm	2,430 mm	
Overall Extended Height with the Backrest Extension	6,350 mm	6,220 mm	
Unladen Weight	3,490 kg	4,740 kg	
ENGINE & SPEED			
Power Type	Battery	Battery	
Battery Capacity	48 V / 450 Amps	80 V / 370 Amps	
Maximum Travel Speed	14.5 km/h	14.5 km/h	
FORKS			
Forks Length	1,070 mm	1,070 mm	
Minimum Fork Spacing	240 mm	240 mm	
Maximum Fork Spacing	970 mm	1,010 mm	



## الرافعــات الشـــوكية FORKLIFTS







#### **REACH STACKERS (ELECTRIC)**

### رفعات المخازن الشوكية الكهربائية

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Forklifts

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

FORKLIFT NAME	Forklift Petrol/LPG: 3.0 Ton, 4.5m Triplex Sideshift	
Maker / Model	Toyota 32-8FG30	
Mast Type	3 Stage full free lift (container stuffer)	
Rated Lift Capacity with Side-shifter	3,000 kg at 500mm load centre	
Maximum lift height	4,500 mm	
Maximum Capacity at full height	2,500 kg at 500mm load centre	
DIMENTION	S & WEIGHT	
Length to face of fork	2,795 mm	
Overall length with 2,420 mm forks	4,015 mm	
Overall width	1,240 mm	
Overall lowered height	2,215 mm	
Overall Extended Height with backrest	5,720 mm	
Unladen weight	4,280 kg	
ENGINE & SPEED		
Engine Type	Petrol/ LPG engine	
Engine Power	58 HP (43 kW)	
Maximum Travel Speed	19 km/h	
FORKS: CHOICE OF 3 FORK LENGTHS ARE AVAILABLE		
Standard Forks	1220 mm (4 ft)	
Long Forks	1,524 mm (5 ft)	
Minimum Fork Spacing	1,820 mm (6 ft)	
Maximum Fork Spacing	240/ 1,070 mm	



## الرافعات الشـوكية FORKLIFTS



### FORKLIFT (DIESEL)

الرفعات الشوكية (ديزل)

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Forklifts

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

DIESEL FORKLIFT SIZE	3.0 TONNES	3.0 TONNES	
	SINGLE FRONT TYRES	SINGLE FRONT TYRES	
Mast Type	3 Stage Full Free Lift (Container Stuffer)	3 Stage Full Free Lift (Container Stuffer)	
Rated Lift Capacity with Side Shift Attachment	2,900 kg at 500mm Load Centre	3,000 kg at 500mm Load Centre	
Maximum Lift Height	4,700 mm	4,300 mm	
	DIMENSIONS & WEIGHT		
Length to Fork Face	2,680 mm	2,770 mm	
Overall Length	3,900 mm	3,990 mm	
Overall Width	1,275 mm	1,240 mm	
Overall Lowered Height	2,165 mm	2,170 mm	
Overall Extended Height with the Backrest Extension	5,840 mm	5,520 mm	
Unladen weight	4,660 mm	4,280 kg	
ENGINE & SPEED			
Engine Type	Diesel Engine	Diesel Engine	
Engine Power	62 HP (46 kW)	59 HP (44 kW)	
Maximum Travel Speed	19 km/h	19 km/h	
FORKS			
Forks Length	1220 mm	1220 mm	
Minimum Fork Spacing	250 mm	240 mm	
Maximum Fork Spacing	1,000 mm	1,070 mm	



For More Information, call: +966 55 733 3875, +966 55 878 1119 - E-mail: awal@mister-machine.com Visit us at www.mister-machine.com

## الرافعات الشــوكية FORKLIFTS





## الرفعات الشوكية (ديزل) FORKLIFT (DIESEL)

DIESEL FORKLIFT SIZE	5.0 TONNES DOUBLE FRONT TYRES	5.0 TONNES SINGLE TYRES	5.0 TONNES SINGLE FRONT TYRES
Maker / Model	Komatsu FD50AT-7	Komatsu FD50AT-7	Toyota 7FDA50
Mast Type	3 Stage Full Free Lift	2 Stage View Mast	3 Stage Full Free Lift with Side Shift
Rated Lift Capacity	With Side Shift	With Side Shift	5,000 kg at 600mm Load Centre
side shift attachment	4,300 kg at	5,000 kg at	3,700 mm
	DIM	ENSIONS & WEIGHT	
Length to Fork Face	3,340 mm	3,340 mm	3,170
Overall Length	5,220 mm	5,220 mm	4,990
Overall Width	1,880 mm	1,880 mm	1,450 mm
Overall Lowered Height	2,460 mm	2,460 mm	2,200 mm
Overall Extended Height with the Backrest Extension	5,610 mm	5,610 mm	5,070 mm
Unladen Weight	7,980 kg	7,980 kg	7,390 kg
	ENGINE & SPEED		
Engine Type	Diesel Engine	Diesel Engine	Diesel Engine
Engine Power	94 HP (70 kW)	94 HP (70 kW)	83 HP (62 kW)
Maximum Travel Speed	24 km/h	24 km/h	24 km/h
FORKS: CHOICE OF 3 FORK LENGTHS ARE AVAILABLE			
Standard Forks	1220 mm	1220 mm	1220 mm
Long Forks	1,820 mm	1,820 mm	1,820 mm
Very Long Forks	2,420 mm (8')	2,420 mm (8')	2,420 mm (8')
Minimum Fork Spacing	300 mm	300 mm	300 mm
Maximum Fork Spacing	1,270 mm	1,270 mm	1,160 mm



## الرافعات الشـوكية FORKLIFTS

### FORKLIFT (DIESEL)

الرفعات الشوكية (ديزل)

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Forklift

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

DIESEL FORKLIFT SIZE	7.0 TONNES DOUBLE FRONT TYRES	7.0 TONNES DOUBLE FRONT TYRES	8.0 TONNES DOUBLE FRONT TYRES
Mast Type	3 Stage Full Free Lift with Side Shift	2 Stage View Mast with Side Shift	2 Stage View Mast with Side Shift
Rated Lift Capacity with Side Shift Attachment	5400 kg at 600mm Load Centre	7000 kg at 600mm Load Centre	8000 kg at 600mm Load Centre
Maximum Lift Height	5,000 mm	3,500 mm	3,500 mm
	DIM	ENSIONS & WEIGHT	
Overall Length	5,390 mm	5,390 mm	5,420 mm
Overall Width	1,960 mm	1,960 mm	1,960 mm
Overall Lowered Height	2,750 mm	2,960 mm	2,960 mm
Overall Extended Height With Backrest Extension	6,280 mm	4,850 mm	4,850 mm
Unladen Weight	10,500 kg	9,850 mm	11,700 mm
	E	ENGINE & SPEED	
Engine Type	Diesel Engine	Diesel Engine	Diesel Engine
Engine Power	100 HP (73kW)	100 HP (73kW)	130 HP (96kW)
Maximum Travel Speed	31 km/h	31 km/h	32 km/h
FORKS: CHOICE OF 2 FORK LENGTHS ARE AVAILABLE			
Standard Forks	Not Available	Not Available	Not Available
Long Forks	1,820 mm	1,820 mm	1,820 mm
Very Long Forks	2,420 mm (8')	2,420 mm (8')	Not available
Minimum Fork Spacing	300 mm	300 mm	300 mm
Maximum Fork Spacing	1,700 mm	1,700 mm	1,800 mm



## الرافعات الشــوكية FORKLIFTS





#### **IMPORTANT NOTES:**

- All our Forklifts are fitted with side shifter attachment to simplify loading / unloading.
- The above Forklift names are as per the manufacturers sizes and apply only to the rated lift capacities with a standard 2 stage, 3 meter masts at 600mm load center fitted with 1220mm forks and without side shifter attachment.
- The lifting capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.



## الرافعات الشـوكية FORKLIFTS

#### FORKLIFT (DIESEL)

الرفعات الشوكية (ديزل)

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Forklift

  All our Equipment are the latest models.
- OPERATORS: Highly Experienced / Motivated Operators.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

DIESEL FORKLIFT SIZE	10.0 TONNES DOUBLE FRONT TYRES	16.0 TONNES DOUBLE FRONT TYRES	
Mast Type	2 Stage View Mast with Side Shift	2 Stage View Mast with Side Shift	
Rated Lift Capacity with Side Shift Attachment	9,500 kg at 600mm Load Centre	15,000 kg at 600mm Load Centre	
Maximum Lift Height	4,000 mm	4,000 mm	
	DIMENSIONS & WEIGHT		
Overall Length	6,670 mm	7240 mm	
Overall Width	2,280 mm	2,480 mm	
Overall Lowered Height	3,740 mm	3,790 mm	
Overall Extended Height With Backrest Extension	6,000 mm	6,280 mm	
Unladen Weight	12,800 kg	18,600 kg	
	ENGINE & SPEED		
Engine Type	Diesel Engine	Diesel Engine	
Engine Output	160 HP (119 kW)	160 HP (119 kW)	
Maximum Travel Speed	32 km/h	33 km/h	
FORKS			
Forks Length	2,420 mm (8')	2,420 mm (8')	
Minimum Fork Spacing	410 mm	440 mm	
Maximum Fork Spacing	2,140 mm	2,200 mm	

#### **IMPORTANT NOTES:**

- All our Forklifts are fitted with side shifter attachment to simplify loading / unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the rated lift capacities with a standard 2 stage, 3 meter masts at 600mm load center fitted with 1220mm forks and without side shifter attachment.
- The lifting capacities become less due to the 3 stage longer masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.



## الرافعات الشــوكية FORKLIFTS













صهاریج الماء WATER TANKER

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Water Tankers, All our Equipment are the latest models.
- DRIVERS: Highly Experienced / Motivated Drivers.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

WATER TANKER CAPACITY	18900 LITERS (5000 U.S Gallons)	
Overall Length	10,000 mm	
Overall Width	2,500 mm	
Overall Height	3,000 mm	
Unlade Weight	12,000 kg	
WATER TANKER CAPACITY		
Gross Vehicle Weight	33,000 kg	







### **FUEL TANKER TRUCKS**

صهاريج الديزل

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Fuel Trucks, All our Equipment are the latest models.
- DRIVERS: Highly Experienced / Motivated Drivers.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

FUEL TRUCK CAPACITY		1,900 LITERS	3,200 LITERS
Overall Length		6,150mm	6,150mm
Overall Width		2,200 mm	2,200 mm
Overall Height		2,400 mm	2,400 mm
Gross Vehicle Weight		7,000 kg	7,000 kg
Unlade Weight		2,800 kg	2,800 kg
Payload		4,200 kg	4,200 kg
Fuel Tank Capacity		1,900 Liters	2,700 Liters
Air Compressor	Capacity	500 Liters	500 Liters
	Engine	7.5HP, Diesel Driven	7.5HP, Diesel Driven
Other Drum Capacity		3 nos. x 200 Liters	3 nos. X 200 Liters





### **FUEL TANKER TRUCKS**

صهاريج الديزل

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Fuel Trucks, All our Equipment are the latest models.
- DRIVERS: Highly Experienced / Motivated Drivers.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

FUEL TANKER CAPACITY	4,500 LITERS	11,000 LITERS	19,000 LITERS
Overall Length	6,150mm	9,530 mm	9,500 mm
Overall Width	2,200 mm	2,425 mm	2,500 mm
Overall Height	2,400 mm	2,730 mm	3,300 mm
Gross Vehicle Weight	7,200 kg	16,500 kg	33,000 kg
Unlade Weight	3,000 kg	6,800 kg	13,000 kg

#### NOTE:

We are Providing the Fuel Supply (Diesel) at All Over Bahrain at Reasonable Rates.









## الشاحنات القلابة DUMP TRUCKS (TIPPERS)

TRUCK CAPACITY	(3 CUBIC METERS)	(12 CUBIC METERS)	(14 CUBIC METERS)
	4 CUBIC YARDS	15 CUBIC YARDS	18 CUBIC YARDS
Overall Length	4,850 mm	8,000 mm	8,000 mm
Overall Width	2,100mm	2,500mm	2,500 mm
Overall Height	2,200 mm	3,200mm	3,200 mm
Gross Vehicle Weight	7,000kg	30,000kg	33,000kg
Unlade Weight	2,500 kg	8,000kg	9,000 kg
Payload	4,500 kg	22,000kg	24,000 kg
Cargo Bay Length	2,850 mm	5,500mm	5,500 mm
Cargo Bay Width	2,000 mm	2,350mm	2,350 mm
Cargo Bay Height	320 mm	1,100mm	1,100 mm







#### **TIPPING SEMI-TRAILERS**

نصف المقطورات القلابة

### MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Trailers, All our Equipment are the latest models.
- DRIVERS: Highly Experienced / Motivated Drivers.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

TIPPING TRAILER CAPACITY	26 CUBIC YARDS (20 CUBIC METERS)
DESIGN TYPE	STANDARD
Overall Length	8,800 mm
Overall Width	2,500 mm
Overall Height	3,300 mm
Unlade Weight	11,000 kg
Payload	28,000 kg
TIPPING BODY DIMENSIONS	
Cargo-Bay Length	8,000 mm
Cargo-Bay Width	2,250 mm
Cargo-Bay Height	1,200 mm

#### **SAFETY NOTES:**

- Care must be exercised while loading the trailers to avoid damage to trailers and tractor heads.
- The truck speed must be reduced especially when loading heavy materials. The speed must be further reduced when approaching road bends and roundabouts to avoid overturning.
- The Cargo must be covered as per road regulations.
- Road regulations restrict the Gross Vehicle Weight of the cargo loaded on the trailers.









CARGO TRUCKS WITH DROP SIDES	شاحنات البضائع ذات الأبواب الجانبية	
TRUCK CAPACITY	7,000 kg	
Overall Length	6,150 mm	
Overall Width	2,200 mm	
Overall Height	2,400 mm	
Gross Vehicle Weight	7,000 kg	
Unlade Weight	2,400 kg	
Payload	4,600 kg	
Cargo Bay Length	3,350 mm	
Cargo Bay Width	2,100 mm	
Cargo Bay Height	380 mm	



### شاحنات الصيانة MAINTENANCE TRUCKS (AIR,OIL ETC...)

TRUCK CAPACITY		7,000 kg
Overall Length		6,150mm
Overall Width		2,200 mm
Overall Height		2,400 mm
Gross Vehicle Weight		7,000 kg
Unlade Weight		2,800 kg
Payload		4,200 kg
Air Compressor	Capacity	500 Liters
	Engine	7.5HP, Diesel Driven
Other Drum Capacity		3 nos.

**NOTE:** All our trucks are fitted with air conditioning to improve the operator comfort and the quality of the work output.





### CARGO TRUCKS WITH DOUBLE CABIN

شاحنات البضائع ذات المقصورتين

- QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Trucks, All our Equipment are the latest models.
- DRIVERS: Highly Experienced / Motivated Drivers.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia.

TRUCK CAPACITY	7,000 kg
Passenger Capacity	7 Passengers
Overall Length	6,150 mm
Overall Width	2,200 mm
Overall Height	2,400 mm
Gross Vehicle Weight	7,000 kg
Unlade Weight	2,800 kg
Payload	4,200 kg
Cargo Bay Length	3,350 mm
Cargo Bay Width	2,100 mm
Cargo Bay Height	380 mm









### LOW BED TRUCK: PAY LOAD 7.5 TONS

Wheel Base	4,800 mm
Lowbed Length	6,700 mm
Lowbed Width	2,450 mm
Front Overhang	1200 mm
Rear Overhang	3,400 mm
Overall Length	9,300 mm
Overall Height	2,840 mm
Lowbed Height	1,120 mm
Ramp Width	5,100 mm
Ramp Length	330 mm



### RECOVERY TRUCK: PAYLOAD 4.5 TONS WITH WINCH

Overall Length	7,400 mm
Overall Width	2300 mm
Overall Height	2,300 mm
Lowbed Length	5,500 mm
Lowbed Width	2300 mm
Lowbed Height	1000 mm

## مقطورات TRAILERS

### **CURTAIN- SIDE SEMI TRAILERS**

### نصف المقطورات ذات الستائر الجانبية

CURTAIN-SIDE CAPACITY	30,000 kg	
Overall Length	12,650 mm	
Overall Width	2,700 mm	
Overall Height	3,400 mm	
Unlade Weight	8,250 kg	
FLAT DECK DIMENSIONS		
Flat-Bed Deck Length	12,650 mm	
Flat-Bed Deck Width	2,550 mm	
Flat-Bed Deck Height	1,500 mm	



### **FLAT - BED SEMI TRAILERS**

### نصف المقطورات المسطحة

FLAT-BED CAPACITY	40,000 kg
Overall Length	12,650 mm
Overall Width	2,700 mm
Overall Height	3,300 mm
Unlade Weight	9,200 kg
Flat-Bed Deck Length	12,000 mm
Flat-Bed Deck Width	2,500 mm
Flat-Bed Deck Height	1,700 mm



### WIRE - MESH SIDE SEMI TRAILERS

### نصف المقطورات ذات الشيائك الجانبية

WIRE - MESH SIDE CAPACITY	30,000 kg
Overall Length	13,000 mm
Overall Width	2,650 mm
Overall Height	3,000 mm
Unlade Weight	8,250 kg
Flat-Bed Deck Length	13,650 mm
Flat-Bed Deck Width	2,550 mm
Flat-Bed Deck Height	1,500 mm





## مقطورات **TRAILERS**







## LOW-BED TOW-BAR TRAILERS

### المقطورات المنخفضة

LOW-BED CAPACITY	2,000 kg	5,000 kg	7,000 kg				
Overall Length	2,800 mm	5,100 mm	5,260 mm				
Overall Width	1,700 mm	2,400 mm	2,600 mm				
Overall Height	1,550 mm	1,600 mm	1,800 mm				
Unlade Weight	500 kg	1,300 kg	1,500 kg				
LOW BED DECK DIMENSIONS							
Low-Bed Deck Length	1,500 mm	3,500 mm	3,650 mm				
Low-Bed Bevel Length	0 mm	500 mm	350 mm				
Low-Bed Deck Width	1,250 mm	1,900 mm	2,100 mm				
Low-Bed Deck Height	400 mm	480 mm	480 mm				
Low-Bed Ramp Length	1,200 mm	1,300 mm	1,500 mm				



LOW-BED SEMI-TRAILERS	نصف المقطورات المنخفضة (لنقل الآليات)			
LOW-BED CAPACITY	10,000 kg	30,000 kg	50,000 kg	60,000 kg
Overall Length	9,450 mm	11,450 mm	12,450	14,800 mm
Overall Width	3,100 mm	3,000 mm	3,000 mm	3,000 mm
Overall Height	1,650 mm	3,600 mm	3,600 mm	3,750 mm
Unlade Weight	4,800 kg	9,500 kg	10,000 kg	15,000 kg
LOW BED DECK DIMENSIONS				
Low-Bed Deck Length	6,100 mm	7,500 mm	8,500 mm	9,500 mm
Low-Bed Bevel Length	800 mm	500 mm	500 mm	1,300 mm
Low-Bed Deck Width	2,600 mm	3,000 mm	3,000 mm	3,000 mm
Low-Bed Deck Height	550 mm	1,050 mm	1,050 mm	1,260 mm
Low-Bed Ramp Length	1,400 mm	3,000 mm	3,300 mm	3,000 mm



## ملاحظات NOTES









#### KINGDOM OF BAHRAIN

**EQUIPMENT DIVISIONS** 

**ACCESS PLATFORMS** +973-17708177, 17705052

FORMWORK AND SCAFFOLDING +973-17705082

**GENERATORS AND COMPRESSORS** 

+973-17708160, 17705059

**HEAVY EQUIPMENTS** 

+973-17708177, 17705052

LIGHT EQUIPMENTS

+973-17705058

**PORTA CABINS** 

+973-17708168

**RAW MATERIALS** 

+973-17705085, 17708173

**SKIPS** 

+973-17708161, 17705061

TRANSPORTATION AND LOGISTICS

+973-17705069

QUALITY USED EQUIPMENT FOR SALE

+973 36757554, 17708173, +966 55 8884575

مملكة البحرين

أقسام المعدات

الرافعات الشخصية المتنقلة

+974 177.4177, 177.0.00

القوالب والسقالات

+9771770076

المولدات الكهربائية والضواغط

+97817771777009

المعدات الثقيلة

+974 177.4177.177.000

المعدات الخفيفة

+9771770.07

كبائن متنقلة

+977177

المواد الخام

+977177000001777

حاويات الأنقاض

+9741717171744+

النقليات والخدمات اللوجستية

+9771770079

بيع المعدات المستعملة الممتازة

#### **BAHRAIN BRANCHES**

#### Maameer

Tel: +973 17708160, 17705082

Fax: +97317700086

Location: Building:541, Road:3417 Block: 634, Maameer Industrial Area

GPS Map: 26.126758,50.60503

#### Manama

Tel: +973 17240166 Fax: +973 17240155

Location: Shop: 313. Road: 336.

Block: 311, Manama

GPS Map: 26.22269,50.5711

#### Muharrag

Tel: +973 17345020

Fax: +973 17346020

Location: Shop: 1157b, Road: 1021,

973 1770 8177 73 1770 8170

Block: 210, Muharraq

GPS Map: 26.2531040,50.6190761

#### Ras Zuwayed

Tel: +973 17705070, +973 17708177

Fax: +973 17703050

Location: Bulding:49, Avenue: 52

Block: 952, Ras Zuwayed

GPS Map: 26.079249,50.6238102

#### Al Hamala

Tel: +973 17616133

Fax: +973 17616144

Location: Shop: 2755, Road: 1448,

Block: 1014, Hamala

### Hafeera

Tel: +973 17705085

## www.mister-machine.com

### MISTER MACHINE

QUALITY EQUIPMENT HIRE

and Wire-mesh

### 

• انصاف المقطورات: السطحات، السطحات المنخفضة، سطحات الستائر، سطحات الشبك

#### 2. LIGHT EQUIPMENT DIVISION

Cleaning Equipment, Cutting Equipment

1. TRANSPORTATION AND LOGISTICS DIVISION

Semi-trailers: Flat-bed, Low-bed, Curtain Side.

- Compaction/Vibration/Light
- Electric Power Tools
- Fixing Tools
- Ladders
- Liftina Equipments
- Painting and Decorating
- Plumbing Equipment
- Water Pumps
- Welding Equipments

#### 3. PORTACABINS DIVISION

- Portable Cabin, with Pantry and Toilet
- Portable Cabin, Open Plan
- Portable Guard Room
- Portable Toilet

#### 4. SKIPS DIVISION

- Skip Bins (Dumpsters)
- Truck and Skip Loader
- Refuse Compactor Truck

#### 5. FORMWORKS AND SCAFFOLDING DIVISION

- Modular Formworks
- Roof Formworks
- Circular Column Formworks
- Scaffolding Frames and Cross Braces.
- Jacks (Props)

#### 6. RAW MATERIALS DIVISION

• Desert Filling, Stones, Aggregates, Sand.

#### 7. GENERATORS AND COMPRESSORS DIVISION

- Generators 1 phase, 3 phase Silent
- Air Compressors- Diesel and Electric
- External Fuel Tanks
- Lighting Towers

#### 8. HEAVY EQUIPMENT DIVISION

- Access Platform: Boom Lift, Scissor Lift
- Heavy Compaction/ Vibration
- Crane Division
- Earth Moving Equipment
- Telescopic Handler (Load-all)
- Forklifts
- Tankers
- Truck and Trailers

#### 9. QUALITY USED EQUIPMENT DIVISION

- Light Equipments
- Scaffolding And Props
- Skip Loaders
- Generators And Compressors
- · Heavy Equipment

#### 

- معدات التنظيف، معدات التقطيع
- المعدات الداكة والهزازة الخفيفة
  - المعدات الكهربائية

مستر مشین خدمات تأجیر متمیزة

- أدوات التصليح
  - السلالم
- معدات الرفع
- معدات الصباغة والدبكور
  - معدات السياكة
  - مضخات المياه
  - معدات اللحام

#### 

- كبائن متنقلة مع المرحاض والمطبخ
  - كىائن متنــقلة مفتوحــة
    - كيائن الحراس
    - مراحیض متنقلة

#### 

- حاويات المخليفات
- شاحنات نقل الحاويات
- شاحنات كيس المخلفات

#### 

- قوالب المقاسات المتعددة
  - قوالب الأسقف
  - القوالب الدائرية
  - أطقم الســقالات
    - الدعائم الثانته

#### ٦. قسم المواد الخام

الأتربة الصحراوية، الأحجار، الرمل، الكونكريت

#### 

- مولدات کهربائیة افیز، ۳ فیز
- ضاغطات الهواء دیزل أو کهریاء
  - خزانات دیزل متنقلة
    - أبراج اللانارة

### 

- الرافعات الشخصية المتنقلة: رافعات عمودية، رافعات تلسكونية
  - المعدات الداكة والهزازة الثقيلة
    - الرافعات المتنقلة
  - - الرافعات التلسكوبية) الرافعات الشوكية
      - الصهاريج
      - القاطرات والمقطورات

#### 9. قسم بيع المعدات المستعملة الممتازة

- المعدات الخفيفة
- أطقم السـقالات والدعائم الثابته
  - شاحنات نقل الحاويات
- مولدات كهربائية وضاغطات الهواء
  - معدات ثقيلة

