



قسم الرافعات الشوكية FORKLIFTS DIVISION



www.mister-machine.com





شركة أوال لتأجير المعدات
Awal Equipment Hiring Company

Forklifts

055 733 3875, 050 079 3332

24 Hours Maintenance
050 083 3327

www.mister-machine.com

Contact Details (Saudi Arabia)	4
Location Map	5
Forklifts (Electric)	6
Forklifts (Petrol/LPG)	12
Forklifts (Diesel)	14
Electric Stackers	28
Reach Trucks	30
Telescopic Handlers	38
Telescopic Handlers (Rotating)	40
Towing Tractors(Diesel)	42
Contact Details (Bahrain)	45
Bahrain Location Map	46

KINGDOM OF SAUDI ARABIA

CONTACT DETAILS

ACCESS PLATFORMS

055 733 3875, 053 533 3045

Forklifts

053 533 3045, 055 733 3875

GENERATORS AND COMPRESSORS

055 733 3875, 050 079 3332

HEAVY EQUIPMENT

053 533 3045, 055 733 3875

TRANSPORTATION AND LOGISTICS

050 079 3332, 053 533 3045

QUALITY USED EQUIPMENT

+973 3975 7554, +966 55 888 4575

المملكة العربية السعودية

بيانات الاتصال

الرافعات الشخصية المتنقلة

٠٥٥ ٧٣٣ ٣٨٧٥, ٠٥٣ ٥٣٣ ٣٠٤٥

الرافعات الشوكية

٠٥٣ ٥٣٣ ٣٠٤٥, ٠٥٥ ٧٣٣ ٣٨٧٥

المولدات الكهربائية والضواغط

٠٥٥ ٧٣٣ ٣٨٧٥, ٠٥٠ ٠٧٩ ٣٣٣٢

المعدات الثقيلة

٠٥٣ ٥٣٣ ٣٠٤٥, ٠٥٥ ٧٣٣ ٣٨٧٥

النقل والخدمات اللوجستية

٠٥٠ ٠٧٩ ٣٣٣٢, ٠٥٣ ٥٣٣ ٣٠٤٥

معدات مستخدمة ممتازة

+٩٧٣ ٣٩٧٥ ٧٥٥٤, +٩٦٦ ٥٥ ٨٨٨ ٤٥٧٥

24 Hours Hotline: 055 878 1119

Email: awal@mister-machine.com

Website: www.mister-machine.com

Al Khobar Branch

Tel : 013 808 4412, 013 808 4413

013 808 4415, 013 808 4419

P.O. Box: 8146, Al Khobar 34623

address

Warehouse, Madar Industrial Area

King Khalid Road, Al Khobar,

Near Al Thuqba Industrial Area

Kingdom of Saudi Arabia

GPS Map: 26.2443, 50.2003



الخط الساخن ٢٤ ساعة: ٠٥٥ ٨٧٨ ١١١٩

Email: awal@mister-machine.com

Website: www.mister-machine.com

فرع الخبر

هاتف: ٠١٣ ٨٠٨ ٤٤١٢, ٠١٣ ٨٠٨ ٤٤١٣

٠١٣ ٨٠٨ ٤٤١٥, ٠١٣ ٨٠٨ ٤٤١٩

ص.ب: ٨١٤٦, الخبر ٣٤٦٢٣

العنوان



مستودع, منطقة مدار الصناعية

طريق الملك خالد, الخبر

بالقرب من منطقة الثقب الصناعية

المملكة العربية السعودية

خريطة الموقع: ٢٦.٢٤٤٣, ٥٠.٢٠٠٣

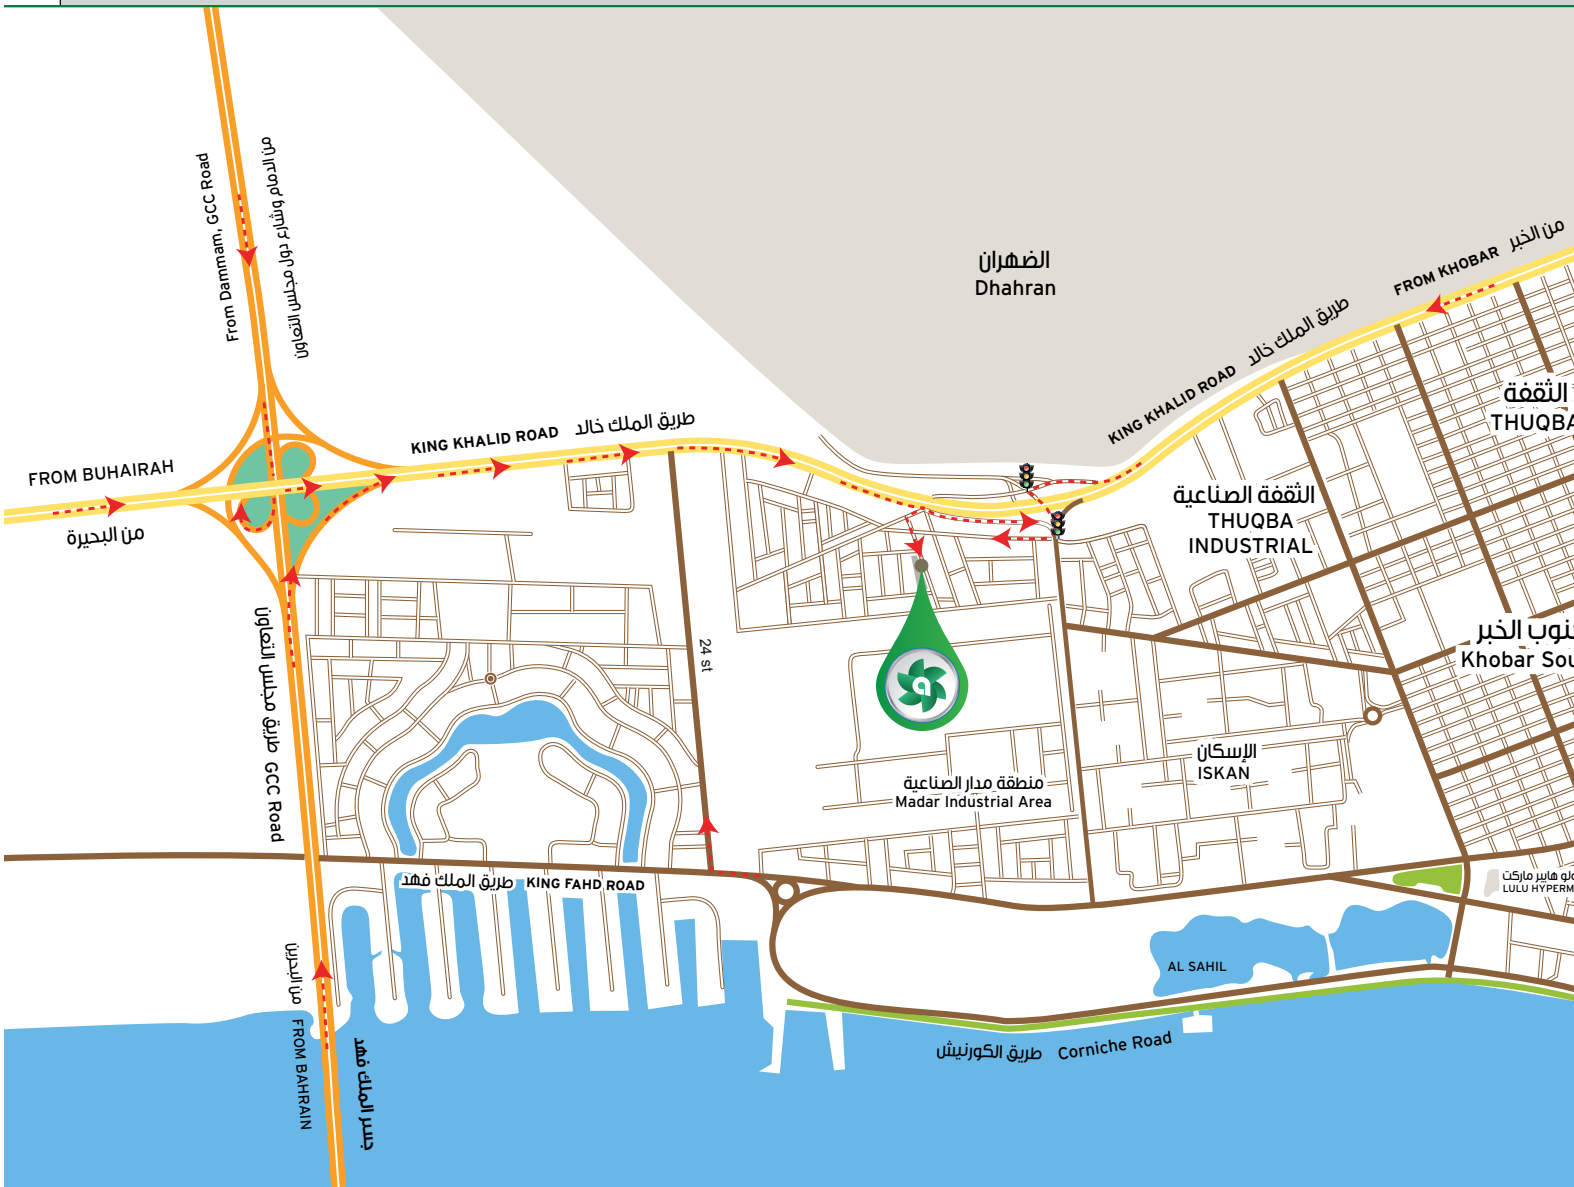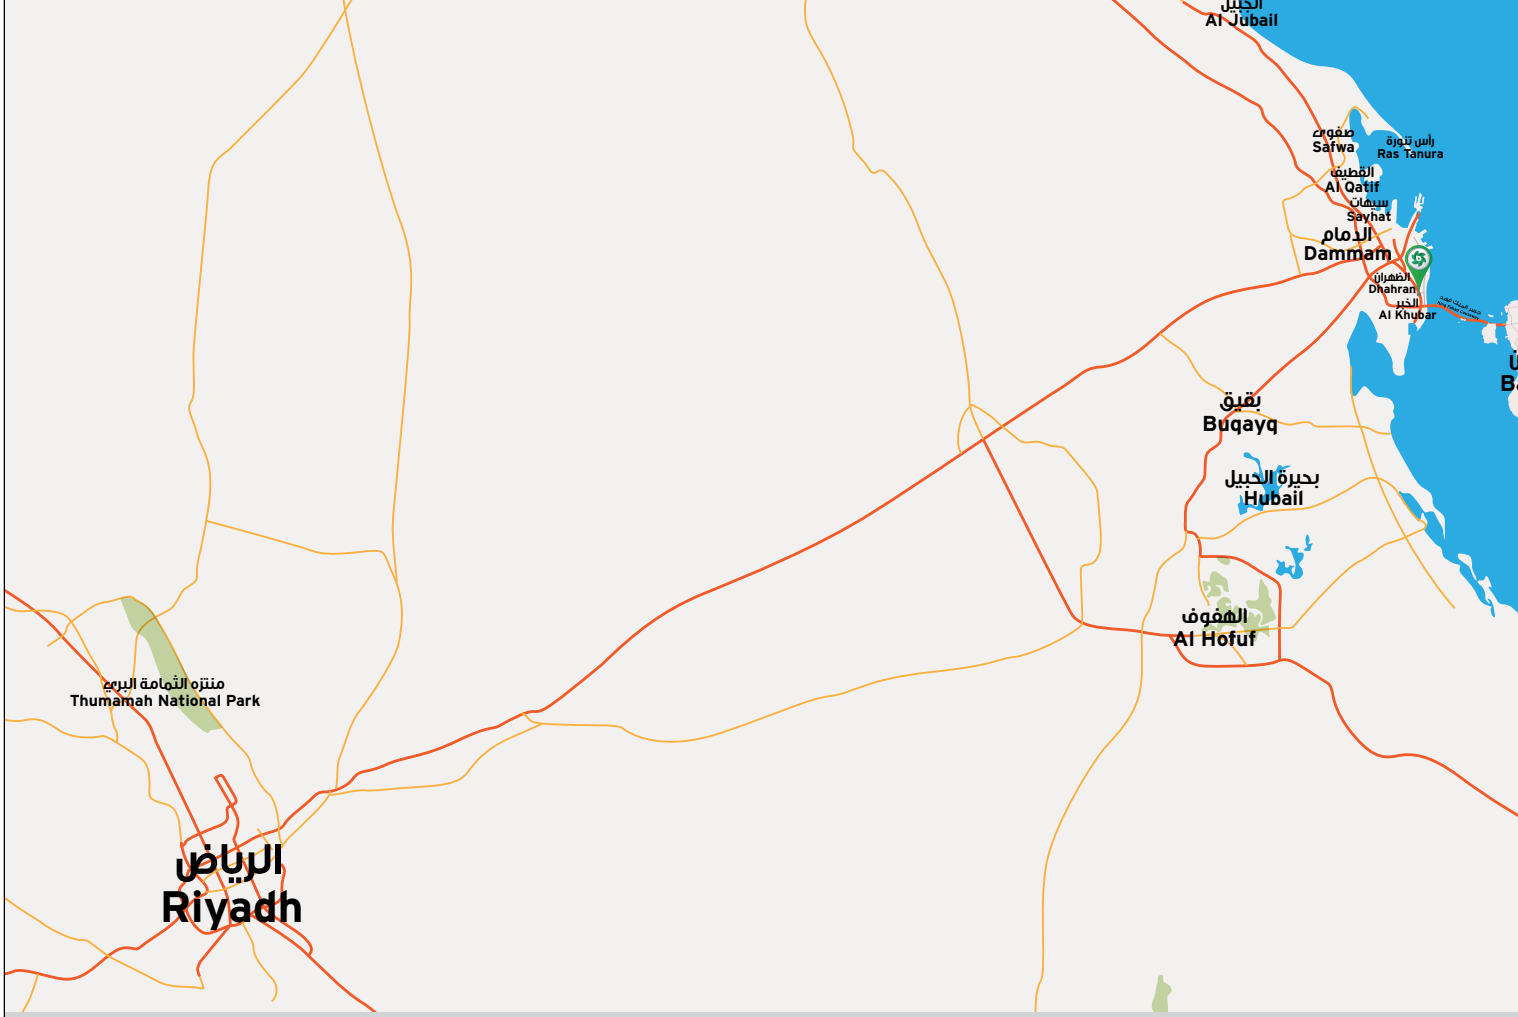

Forklifts (Electric)		الرافعات الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklifts Size	Forklifts Battery: 2.5 Tons, 4.3m Triplex Sideshift	Forklifts Battery: 2.5 Tons, 4.7m Triplex Sideshift	
Maker / Model	Toyota 8FBN25	Toyota 8FBN25	
Mast Type	3 Stage full free lift (container stuffer)	3 Stage full free lift	
Rated Lift Capacity with Side-shift attachment at different Load Centers	2,300 kg at 500 mm 2,080 kg at 600 mm 1,510 kg at 1,000 mm	2,050 kg at 500 mm 1,850 kg at 600 mm 1,340 kg at 1,000 mm	
Free Lift with load backrest	0 mm	0 mm	
Maximum lift height	4,300 mm	4,700 mm	
DIMENSIONS & WEIGHT			
Length to Fork Face	2,325 mm	2,325 mm	
Overall Length with 1,200 mm Forks	3,525 mm	3,525 mm	
Overall width	1,180 mm	1,180 mm	
Overall lowered height	1,970 mm	2,120 mm	
Overall Extended Height with load backrest.	5,550 mm	5,950 mm	
Unladen weight	4,170 kg	4,270 kg	
ENGINE & SPEED			
Power Type	Battery	Battery	
Battery Capacity	48V/725Ah	48V/565Ah or 48V/725Ah	
Maximum Travel Speed	16.0 km/h	16.0 km/h	
FORKS			
Standard Forks	1220 mm (4 ft)	1220 mm (4 ft)	
Long Forks	1,524 mm (5 ft)	1,524 mm (5 ft)	
Very Long Forks	1,820 mm (6 ft)	1,820 mm (6 ft)	
Fork Spacing (Min/ Max)	245 mm / 1020 mm	245 mm / 1020 mm	



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Electric)		الرافعات الشوكية الكهربائية	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklifts Size	Forklifts Battery: 3.0 Tons, 4.3m Triplex Sideshift	Forklifts Battery: 3.0 Tons, 4.5m Triplex Sideshift	Forklifts Battery: 3.0 Tons, 6.0m Triplex Sideshift
Maker / Model	Toyota 8FBN30	Hyundai 30B-7AC	Jungheinrich EFG 430
Mast Type	3 Stage full free lift (container stuffer)	3 Stage full free lift (container stuffer)	Stage full free lift 3
Rated Lift Capacity with	3,000 kg @ 500 mm 2,720 kg @ 600 mm 2,490 kg @ 700 mm 1,990 kg @ 1,000 mm	2,670 kg @ 500 mm 2,450 kg @ 600 mm 2,200 kg @ 750 mm 2,000 kg @ 900 mm	2,200 kg @ 500 mm 1,860 kg @ 600 mm 1,660 kg @ 700 mm
Side-shift attachment at different Load Centers	945 mm	922 mm	1,472 mm
Free Lift with load backrest	4,300 mm	4,500 mm	6,000 mm
MAXIMUM LIFT HEIGHT			
Length to Fork Face	2,485 mm	2,542 mm	2,427 mm
Overall Length with 1,220mm Forks	3,705 mm	3,762 mm	3647 mm
Overall width	1,235 mm	1,200 mm	1,198 mm
Overall lowered height	2,165 mm	2,112 mm	2,680 mm
Overall Extended Height with load backrest.	5,565 mm	5,685 mm	6,730 mm
Unladen weight	49,800 kg	4,873 kg	5,220 kg
ENGINE & SPEED			
Power Type	Battery	Battery	Battery
Battery Capacity	80 V / 470 AH	48 V / 750 AH	80 V / 775 AH
Maximum Travel Speed	18.0 km/h	18.0 km/h	20.0 km/h
FORKS			
Standard Forks	1220 mm (4 ft)	1220 mm (4 ft)	1150 mm
Long Forks	1,524 mm (5 ft)	1,524 mm (5 ft)	1,524 mm (5 ft)
Very Long Forks	1,830 mm (6 ft)	1,830 mm (6 ft)	1,830 mm (6 ft)
Fork Spacing (Min./ Max.)	245/ 1,070 mm	240/ 1,070 mm	250/ 1,000 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Electric)		الرافعات الشوكية الكهربائية
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 		
Forklifts Size	Forklifts Battery: 3.5 Ton, 6.0m Triplex Sideshift	
Maker / Model	Hyundai 35B-9AC	
Mast Type	Stage full free lift 3	
Rated Lift Capacity with	2,950 kg @ 500 mm 2,850 kg @ 600 mm 2,540 kg @ 750 mm 2,380 kg @ 900 mm	
Side-shift attachment at different Load Centers	1,563 mm	
Free Lift with load backrest	6,000 mm	
MAXIMUM LIFT HEIGHT		
Length to Fork Face	2,590 mm	
1,220mm Forks Overall Length with	3,810 mm	
Overall width	1,250 mm	
Overall lowered height	2,743 mm	
Overall Extended Height with load backrest.	7,190 mm	
Unladen weight with Battery	6,826 kg	
ENGINE & SPEED		
Power Type	Battery	
Battery Capacity	48 V / 740 AH	
Maximum Travel Speed	18.0 km/h	
FORKS		
Standard Forks	1220 mm (4 ft)	
Long Forks	1,524 mm (5 ft)	
Very Long Forks	1,830 mm (6 ft)	
Fork Spacing (Min./ Max.)	240/ 1,070 mm	



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Petrol/LPG)		الرافعات المخازن الشوكية الكهربائية
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 		
Forklifts Size	Forklifts Petrol/LPG: 3.0 Ton, 4.5m Triplex Sideshift	
Maker / Model	Toyota 32-8FG30	
Mast Type	Stage full free lift (container stuffer 3)	
Rated Lift Capacity with side-shifter at different Load Centers	2,700 kg at 500 mm 2,460 kg at 600 mm 1,830 kg at 1,000 mm	
Free Lift with load backrest	995 mm	
Maximum lift height	4,500 mm	
DIMENSIONS & WEIGHT		
Length to Fork Face	2,795 mm	
1220mm Forks Overall length with	4,015 mm	
Overall width	1,240 mm	
Overall lowered height	2,215 mm	
Overall Extended Height with the load backrest	5,720 mm	
Unladen weight	4,690 kg	
ENGINE & SPEED		
Engine Type	Petrol/ LPG engine	
Engine Power	58 HP (43 kW)	
Maximum Travel Speed	19 km/h	
FORKS		
Standard Forks	1220 mm (4 ft)	
Long Forks	1,524 mm (5 ft)	
Very Long Forks	1,820 mm (6 ft)	
Fork Spacing (Min./ Max.)	240 mm / 1,070 mm	



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 		
Forklifts Name	Forklifts Diesel: 3.0 Ton, 4.3m Triplex Sideshift	Forklifts Diesel: 3.0 Ton, 5.0m Triplex Sideshift
Maker / Model	Toyota 62-8FD30	Hyundai 30 DF-7
Mast Type	3 Stage full free lift (container stuffer)	3 Stage full free lift
Rated Lift Capacity with Side-shifter at different Load Centers	3,000 kg at 500 mm 2,730 kg at 600 mm 2,010 kg at 1000 mm	2,580 kg at 500 mm 2,350 kg at 600 mm 1,800 kg at 1000 mm
Free Lift with load backrest	945 mm	1,110 mm
Maximum lift height	4,300 mm	5,000 mm
DIMENSIONS & WEIGHT		
Length to Fork Face	2,770 mm	2,690 mm
Overall length with 1220mm Forks	3,990 mm	3,910 mm
Overall width	1,240 mm	1,230 mm
Overall lowered height	2,170 mm	2,290 mm
Overall Extended Height with the load backrest	5,520 mm	5,840 mm
Unladen weight	4,620 kg	4,534 kg
ENGINE & SPEED		
Engine Type	Diesel engine	Diesel engine
Engine Power	59 HP (44 kW)	52 HP (39 kW)
Maximum Travel Speed	18 km/h	18.5 km/h
FORKS		
Standard Forks	1220 mm (4 ft)	1220 mm (4 ft)
Long Forks	1,524 mm (5 ft)	1,524 mm (5 ft)
Very Long Forks	1,830 mm (6 ft)	1,830 mm (6 ft)
Minimum Fork Spacing	240/ 1,070 mm	250/ 1,000 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)	
MISTER MACHINE®			
<ul style="list-style-type: none"> QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. OPERATORS: Highly experienced / motivated operators. AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklifts Name	Forklifts Diesel: 5.0 Ton, 3.7m Duplex Sideshift	Forklifts Diesel: 5.0 Ton, 4.0m Duplex Sideshift	Forklifts Diesel: 5.0 Ton, 4.0m Triplex Sideshift
Front Tyres	Single Front Tyres	Single Front Tyres	Single Front Tyres
Maker / Model	Toyota 7FDA50, 8FD50N	Toyota 8FD50N	Toyota 7FDA50
Mast Type	Stage View Mast 2 with side shift	Stage View Mast 2 with side shift	Stage full free lift 3 with side shift
Rated Lift Capacity with Side-shifter at different Load Centers	4,570 kg at 600 mm 4,250 kg at 700 mm 3,100 kg at 1200 mm	4,570 kg at 600 mm 4,250 kg at 700 mm 3,100 kg at 1200 mm	4,470 kg at 600 mm 4,170 kg at 700 mm 3,070 kg at 1200 mm
Free Lift with load backrest	125 mm	125 mm	900 mm
Maximum lift height	3,700 mm	4,000 mm	4,000 mm
DIMENSIONS & WEIGHT			
Length to Fork Face	3,170 mm	3,170 mm	3,170 mm
Overall length with 1830mm Forks	5,000 mm	5,000 mm	5,000 mm
Overall width	1,450 mm	1,450 mm	1,450 mm
Overall lowered height	2,800 mm	3,050 mm	2,270 mm
Overall Extended Height with the backrest extension	5,135 mm	5,435 mm	5,435 mm
Unladen weight	7,570 kg	7,630 kg	7,800 kg
ENGINE & SPEED			
Engine Type	Diesel engine	Diesel engine	Diesel engine
Engine Power	75 HP (56 kW)	75 HP (56 kW)	75 HP (56 kW)
Maximum Travel Speed	24 km/h	24 km/h	24 km/h
FORKS			
Standard Forks	1220 mm (4 ft)	1220 mm (4 ft)	1220 mm (4 ft)
Long Forks	1,830 mm (6 ft)	1,830 mm (6 ft)	1,830 mm (6 ft)
Very Long Forks	2,440 mm (8 ft)	2,440 mm (8 ft)	2,440 mm (8 ft)
Fork Spacing (Min./ Max.)	300 mm / 1,160 mm	300 mm / 1,160 mm	300 mm / 1,160 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 		
Forklifts Name	Forklifts Diesel: 7.0 Ton, 3.7m Duplex Sideshift	Forklifts Diesel: 7.0 Ton, 4.0m Duplex Sideshift
Maker / Model	Toyota 8FD70N	Hyundai 70DF-7
Mast Type	Stage View Mast with side shift 2	Stage View Mast with side shift 2
Rated lift capacity with side-shifter at different load centers	6,370 kg at 600 mm 5,920 kg at 700 mm 4,320 kg at 1200 mm	7000 kg at 600 mm 6,500 kg at 700 mm 5,000 kg at 1200 mm
Free lift with load backrest	125 mm	140 mm
Maximum lift height	3,700 mm	4,000 mm
DIMENSIONS & WEIGHT		
Length to Fork Face	3,545 mm	3,615 mm
Overall length with 1830 mm Forks	5,275 mm	5,445 mm
Overall width	1,965 mm	2,068 mm
Overall lowered height	3,060 mm	3,015 mm
Overall Extended Height with backrest	5,435 mm	5,320 mm
Unladen weight	9,650 kg	10,038 mm
ENGINE & SPEED		
Engine Type	Diesel engine	Diesel engine
Engine Power	88.5 HP (66 kW)	99 HP (73.6 kW)
Maximum Travel Speed	20.5 km/h	22.7 km/h
FORKS		
Standard Forks	1220 mm (4 ft)	1220 mm (4 ft)
Long Forks	1,830 mm (6 ft)	1,830 mm (6 ft)
Very Long Forks	2,440 mm (8 ft)	2,440 mm (8 ft)
Fork Spacing (Min./ Max.)	300/ 1,700 mm	300/ 1,700 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklifts Name		Forklifts Diesel: 8.0 Ton, 3.5m Duplex Sideshift	
Maker / Model	Komatsu FD 80-8		
Mast Type	2 Stage View Mast with side shift		
Rated Lift Capacity with Side-shifter at different Load Centers	7,900 kg at 600 mm 6,900 kg at 900 mm 5,400 kg at 1200 mm		
Free Lift with load backrest	220 mm		
Maximum lift height	3,500 mm		
DIMENSIONS & WEIGHT			
Length to fork face	3,670 mm		
Overall length with 1830 mm Forks	5,500 mm		
Overall width	2,050 mm		
Overall lowered height	2,960 mm		
Overall Extended Height with backrest	4,850 mm		
Unladen weight	11,550 mm		
ENGINE & SPEED			
Engine Type	Diesel engine		
Engine Power	93 HP (69kW)		
Maximum Travel Speed	31 km/h		
FORKS			
Standard Forks	1220 mm (4 ft)		
Long Forks	1,830 mm (6 ft)		
Very Long Forks	2,440 mm (8 ft)		
Fork Spacing (Minimum/ Maximum)	300 / 1800 mm		



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 		
Forklift Name	Forklift Diesel: 10.0 Ton, 3.7m Duplex Sideshift	Forklift Diesel: 10.0 Ton, 3.7m Duplex Sideshift
Maker / Model	Komatsu FD100-8	Toyota FD100T
Mast Type	2 Stage View Mast with side-shift	2 Stage View Mast with side-shift
Rated Lift Capacity with Side-shifter at different Load Centers	9,500 kg at 600 mm 7,700 kg at 900 mm 6,460 kg at 1200 mm	9,500 kg at 600 mm 7,700 kg at 900 mm 6,460 kg at 1200 mm
Free Lift with load backrest	0 mm	0 mm
Maximum lift height	3,700 mm	3,700 mm
DIMENSIONS & WEIGHT		
Length to Fork Face	4,245 mm	4,200 mm
Overall length with 2440mm Forks	6,685 mm	6,640 mm
Overall width	2,280 mm	2,315 mm
Overall lowered height	3,240 mm	3,255 mm
Overall Extended Height with backrest	5,100 mm	5,105 mm
Unladen weight	12,800 kg	13,570 kg
ENGINE & SPEED		
Engine Type	Diesel engine	Diesel engine
Engine Power	164 HP (122 kW)	168 HP (125 kW)
Maximum Travel Speed	32 km/h	32 km/h
FORKS		
Standard Forks	1,830 mm (6 ft)	1,830 mm (6 ft)
Long Forks	2,440 mm (8 ft)	2,440 mm (8 ft)
Fork Spacing (Minimum)	410 mm	420 mm
Fork Spacing (Maximum)	2,140 mm	2,140 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklifts Name		Forklift Diesel: 11.0 Tons, 4.0m Duplex Sideshift	
Maker / Model	Hyundai 110D-7E (A/C)		
Mast Type	2 Stage View Mast with side-shift		
Rated Lift Capacity with Side-shifter at different Load Centers	11,000 kg at 600 mm 10,000 kg at 700 mm 9,100 kg at 1000 mm		
Free Lift with load backrest	0 mm		
Maximum lift height	4,000 mm		
DIMENSIONS & WEIGHT			
Length to fork face	4,340 mm		
Overall length with 1830 mm Forks	6,780 mm		
Overall width	2,450 mm		
Overall lowered height	3,550 mm		
Overall Extended Height with backrest	5,465 mm		
Unladen weight	17,017 kg		
ENGINE & SPEED			
Engine Type	Diesel engine		
Engine Power	160 HP (119 kW)		
Maximum Travel Speed	34.7 km/h		
FORKS			
Standard Forks	1,830 mm (6 ft)		
Long Forks	2,440 mm (8 ft)		
Very Long Forks	500 mm		
Fork Spacing (Minimum/ Maximum)	2,357 mm		



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Forklifts (Diesel)		الرافعات الشوكية (ديزل)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our forklifts are of the best quality, maintained to the highest standard, all our Forklifts are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Forklift Name	Forklift diesel: 16.0 Ton, 4.0m Duplex sideshift	Forklift diesel: 16.0Ton, 4.0m Duplex sideshift	Forklift diesel: 16.0 Ton, 4.5m Triplex sideshift
Maker / Model	Toyota 4FDK160 (A/C)	Hyundai 160D-7E (A/C)	Hyundai 160D-7E (A/C)
Mast Type	2 Stage view mast with side shift and fork positioner	2 Stage view mast with side shift and fork positioner	3 Stage full free lift with side shift and fork positioner
Rated Lift Capacity with side-shift/ fork positioner at different Load Centers	15,000 kg at 600mm 12,400 kg at 900mm 10,600 kg at 1200mm	15,200 kg at 600mm 13,800 kg at 700mm 12,600 kg at 1000mm	14,800 kg at 600mm 13,400 kg at 700mm 12,200 kg at 1000mm
Free Lift with load backrest	0 mm	0 mm	1,790 mm
Maximum lift height	4,000 mm	4,010 mm	4,500 mm
DIMENSIONS & WEIGHT			
Length to Fork Face	4,700 mm	4,905 mm	4,905 mm
Overall length with 2440mm Forks	7,140 mm	7,345 mm	7,345 mm
Overall width	2,485 mm	2,497 mm	2,497 mm
Overall lowered height	3,670 mm	3,750 mm	2,950 mm
Overall Extended Height with backrest	5,670 mm	5,710 mm	6,204 mm
Unladen weight	20,030 kg	20,725 kg	21,573 kg
ENGINE & SPEED			
Engine Type	Diesel engine	Diesel engine	Diesel engine
Engine Power	167 HP (125 kW)	160 HP (119 kW)	160 HP (119 kW)
Maximum Travel Speed	34.0 km/h	33.6 km/h	33.6 km/h
FORKS			
Long Forks	2,440 mm (8 ft)	2,440 mm (8 ft)	2,440 mm (8 ft)
Fork Spacing - Minimum	500 mm	500 mm	500 mm
Fork Spacing - Maximum	2,210 mm	2,497 mm	2,497 mm



NOTES:

- All our Forklifts are fitted with side shifter attachment to simplify loading/ unloading.
- The above Forklift Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 600mm Load center fitted with 1220mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stages/ longer mast, side shifter, longer forks, and higher load centre.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Electric Stackers		رافعات المخازن الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Stackers are of the best quality, maintained to the highest standard, all our Reach Stackers are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Electric Stacker Name		Stacker Battery: 1.0 Ton, 3.3m Duplex	
Maker / Model	BT SWE 100		
Mast Type	2 Stage View Mast		
Rated Lift Capacity with side shift attachment	1,000 kg at 500 mm load centre		
Maximum lift height	3,300 mm		
DIMENSIONS & WEIGHT			
Length to Fork Face (including stand)	1200 mm		
Overall width	800 mm		
Overall lowered height	2750 mm		
Overall Extended Height with the backrest extension	3730 mm		
Unladen weight with Battery	800 kg		
ENGINE & SPEED			
Power Type	Battery		
Battery Capacity	24 V/A		
Maximum Travel Speed	Walk behind		
FORKS			
Forks length	1150 mm		
Fork Spacing (fixed)	570 mm		



NOTES:

- All our Electric Stackers are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Reach Trucks (Electric)		رافعات المخازن الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Stackers are of the best quality, maintained to the highest standard, all our Reach Stackers are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Reach Truck Size		Reach Truck Battery: 1.4Ton, 4.7m Triplex Sideshift	
Maker / Model	Toyota 6FBRE14		
Mast Type	3 Stage full free lift (container stuffer)		
Rated Lift Capacity with side shift attachment	1,350 kg at 600 mm load centre 1,170 kg at 700 mm load centre 1,050 kg at 800 mm load centre		
Maximum lift height	4,700 mm		
Free Lift with load backrest	1,295 mm		
Operator Position	Rider Seated		
DIMENSIONS & WEIGHT			
Length to Fork Face	1,145 mm		
Overall width	1,250 mm		
Overall lowered height	2,145 mm		
Overall Extended Height with backrest	5,550 mm		
Unladen weight	2,610 kg		
ENGINE & SPEED			
Power Type	Battery		
Battery Capacity	48V / 360 A		
Maximum Travel Speed	10 km/h		
FORKS			
Forks length	1,070 mm		
Minimum Fork Spacing	220 mm		
Maximum Fork Spacing	850 mm		



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Reach Trucks (Electric)		رافعات المخازن الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Reach Truck Size	Reach Truck Battery: 1.6 Ton, 4.8m Triplex Sideshift	Reach Truck Battery: 1.6Ton, 5.7m Triplex Sideshift	Reach Truck Battery: 1.6Ton, 6.0m Triplex Sideshift
Maker / Model	Toyota 6FBRE16	Toyota 6FBRE16	Toyota 6FBRE16
Mast Type	3 Stage full free lift (container stuffer)	3 Stage full free lift	3 Stage full free lift
Rated Lift Capacity with Side-shift attachment at different Load Centers	1,600kg at 600 mm 1,390kg at 700 mm 1,230kg at 800 mm	1,600 kg at 600 mm 1,390 kg at 700 mm 1,230 kg at 800 mm	1,500 kg at 600 mm 1,340 kg at 700 mm 1,210 kg at 800 mm
Maximum lift height	4,800 mm	5,700 mm	6,000 mm
Free Lift with load backrest	1,550 mm	1,850 mm	1,745 mm
Operator Position	Rider Seated	Rider Seated	Rider Seated
DIMENSIONS & WEIGHT			
Length to Fork Face	1,286 mm	1,145 mm	1,145 mm
Overall Length with Forks	2,436 mm	2,295 mm	2,215 mm
Overall width	1,270 mm	1,250 mm	1,250 mm
Overall lowered height	2,182 mm	2,245 mm	2,595 mm
Overall Extended Height with backrest	5,432 mm	5,850 mm	6,850 mm
Unladen weight	3,035 kg	3,020 kg	3,500 kg
ENGINE & SPEED			
Power Type	Battery	Battery	Battery
Battery Capacity	48V / 360 AH	48V / 420 AH	48V / 420 AH
Maximum Travel Speed	10 km/h	10 km/h	10 km/h
FORKS			
Forks length	1150 mm	1150 mm	1070 mm
Minimum Fork Spacing	272 mm	220 mm	220 mm
Maximum Fork Spacing	718 mm	850 mm	850 mm



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Reach Trucks (Electric)		رافعات المخازن الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Reach Truck Size	Reach Truck Battery: 1.7 Ton, 6.5m Triplex Sideshift	Reach Truck Battery: 1.7 Ton, 7.1m Triplex Sideshift	
Maker / Model	Still FM-X17	Still FM-X17	
Mast Type	3 Stage full free lift	3 Stage full free lift	
Rated Lift Capacity with side shift attachment	1,700kg at 600 mm 1,500kg at 700 mm 1,340kg at 800 mm	1,700kg at 600 mm 1,500kg at 700 mm 1,340kg at 800 mm	
Maximum lift height	6,500 mm	7,100 mm	
Free Lift with load backrest	2,140 mm	2,340 mm	
Operator Position	Rider Seated	Rider Seated	
OPERATOR POSITION			
Length to Fork Face	1,262 mm	1,262 mm	
Overall Length with Forks	2,412 mm	2,412 mm	
Overall width	1,140 mm	1,140 mm	
Overall lowered height	2,700 mm	2,900 mm	
Overall Extended Height with backrest	7,060 mm	7,660 mm	
Unladen weight	3,594 kg	3,740 kg	
ENGINE & SPEED			
Power Type	Battery	Battery	
Battery Capacity	48V / 620 AH	48V / 620 AH	
Maximum Travel Speed	10 km/h	10 km/h	
FORKS			
Forks length	1150 mm	1150 mm	
Minimum Fork Spacing	316 mm	316 mm	
Maximum Fork Spacing	760 mm	760 mm	



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Reach Trucks (Electric)		الرافعات الشوكية (الكهربائية)	
MISTER MACHINE®			
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates. • OPERATORS: Highly experienced / motivated operators. • AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia. 			
Reach Truck Size	Reach Truck Battery: 2.0 Ton, 5.0m Triplex Sideshift	Reach Truck Battery: 2.0 Ton, 6.3m Triplex Sideshift	Reach Truck Battery: 2.0 Ton, 8.0m Triplex Sideshift
Maker / Model	Toyota 6FBRE20	Toyota 8FBRE20	Toyota 6FBRE20
Mast Type	3 Stage full free lift (container stuffer)	3 Stage full free lift	3 Stage full free lift
Rated Lift Capacity with side shift attachment	2,000 kg at 600 mm 1,770 kg at 700 mm 1,320 kg at 1000 mm	2,000 kg at 600 mm 1,770 kg at 700 mm 1,320 kg at 1000 mm	1,350 kg at 600 mm load centre 1,250 kg at 700 mm load centre
Maximum lift height	5,000 mm	6,300 mm	8,000 mm
Free Lift with load backrest	1,365 mm	2,225 mm	2,715 mm
Operator Position	Rider Seated	Rider Seated	Rider Seated
OPERATOR POSITION			
Length to Fork Face	1,250 mm	1214 mm	1,250 mm
Overall Length with Forks	2,320 mm	2364 mm	2,320 mm
Overall width	1,250 mm	1,270 mm	1,250 mm
Overall lowered height	2,215 mm	2,732 mm	3,565 mm
Overall Extended Height with backrest	5,850 mm	6,846 mm	8,850 mm
Unladen weight	3,800 kg	4,203 kg	4,900 kg
ENGINE & SPEED			
Power Type	Battery	Battery	Battery
Battery Capacity	48V / 420 AH	48V / 600 AH	48V / 600 AH
Maximum Travel Speed	10 km/h	10 km/h	10 km/h
FORKS			
Forks length	1,070 mm	1,150 mm	1,070 mm
Minimum Fork Spacing	245 mm	272 mm	245 mm
Maximum Fork Spacing	820 mm	820 mm	820 mm



NOTES:

- All our Reach Trucks are fitted with side shifter attachment to simplify loading/ unloading.
- The above Reach Trucks Names are as per the Manufacturers sizes and apply only to the Rated Lift Capacities with a standard 2 stage, 3 meter Masts at 500mm Load center fitted with 1070mm Forks and without side shifter attachment.
- The Lifting Capacities become less due to the 3 stage longer Masts, the side shifter, the longer forks, and for higher load centres.
- Care must be exercised when handling elevated loads as the Forklift stability is reduced. It is important that mast tilt in either direction is kept to a minimum when loads are raised.

Telescopic Handler (Loadall)

الرافعات التلسكوبية

MISTER MACHINE®

- QUALITY EQUIPMENT HIRE: All our Reach Trucks are of the best quality, maintained to the highest standard, all our Reach Trucks are the latest models.
- COMPETITIVE HIRE RATES: The Best Quality and Hire Rates.
- OPERATORS: Highly experienced / motivated operators.
- AVAILABILITY: We are available in the Kingdom of Bahrain and the Kingdom of Saudi Arabia.

Telescopic Handler Size	3.5 Tons With 12.5 M Lift Height	4.0 Tons With 16.7 M Lift Height
Maker / Model	(JCB Loadall 535-125)	(JCB Loadall 540-170)
Overall Length to front carriage	5,840 mm	6,360 mm
Overall Width	2,350 mm	2,440 mm
Travel Height (folded)	2,590 mm	2,690 mm
Operational Weight	9,140 kg	12,160 kg
Maximum Travel Speed	25 km/h	25 km/h
Gross Power	62.0 kW (82.5 HP)	76.1 kW (102 HP)
Fuel Tank Capacity	125 litres	125 litres

LIFT PERFORMANCE WITH STABILISERS EXTENDED:

Maximum lift capacity	3,500 kg	4,000 kg
Lift capacity to full height	3,200 kg to 12.5 m	2,500 kg to 16.7 m
Lift capacity at full reach	1,200 kg at 8.0 m	600 kg at 12.5 m
Lift height	12.3 m	16.7 m
Maximum forward reach	8.0 m	12.5 m

ATTACHMENTS:

FORKS		
Forks Length	1100 mm	1100 mm
Maximum Forks Spacing	1,100	1,100
FRONT SHOVEL		
Front Shovel Capacity	1.0 cu. m	1.0 cu. m
Front Shovel Width	2350 mm	2350 mm
MAN BASKET (EXTRA)		
Dimensions (LxWxH)	1100 x 1100 x1800 mm	1100 x 1100 x1800 mm
CRANE HOOK (EXTRA)		
Maximum Lift Capacity	3500 kg	4000 kg



Telescopic Handler (Rotating)	الرافعات التلسكوبية (المحورية)
Telescopic Handler Size	5.0m Tons with 21.9 Lift Height
Maker / Model	(Genie Rotating GTH-5022 R)
Overall Length to front carriage	7,700 mm
Overall Width	2,490 mm
Travel Height (folded)	3,050 mm
Operational Weight	19,250 kg
Maximum Travel Speed	30 km/h
Gross Power	116.5 kW (156 HP)
Fuel Tank Capacity	125 litres

LIFT PERFORMANCE WITH STABILISERS EXTENDED

Maximum lift capacity	5,000 kg
Lift capacity at full height	2,500 kg at 21.9 m
Lift capacity at full reach	400 kg at 18.93 m
Lift height	21.93 m
Maximum forward reach	18.93 m

ATTACHMENTS

FORKS	
Forks Length	1200mm
Maximum Forks Spacing	1,100
FRONT SHOVEL	
Front shovel capacity	1.0 cu. m
Front shovel width	2350 mm
ROTATING & EXTENDABLE MAN-PLATFORM (EXTRA)	
Dimensions (LxW)	2300 x 1000 mm
Platform Lift Capacity	200 kg (suitable for 2 person)
HYDRAULIC CRANE WINCH (EXTRA)	
Maximum Lift Capacity	3000 kg

الرافعات التلسكوبية (المحورية)
Telescopic Handler (Rotating)



Towing Tractors (Diesel)		جرارات القطر (ديزل)
MISTER MACHINE®		
<ul style="list-style-type: none"> • QUALITY EQUIPMENT HIRE: Hiring the best performance, most reliable Telescopic Handlers (Loadalls), All our Telescopic Handlers are the latest models. • OPERATORS: Highly Experienced / Motivated Operators. • EXTRA: Highly All our Telescopic Handlers are fitted with Air Conditioning. This is to improve the Operator's Comfort and the Quality of the work output. • COMPETITIVE HIRE RATES: The Best Quality and Hire Rates in Kingdom of Saudi Arabia. 		
Forklifts Name		Towing Tractor Diesel: 2.5 Tons
Maker / Model		Toyota 2TD25
Maximum Drawbar Pull		2,500 kg
Towed weight at dry even concrete surfaces	with one trailer	33,000 kg
	with a train of two or more trailers	49,000 kg
DIMENSIONS & WEIGHT		
Overall length		3,130 mm
Overall width		1,420 mm
Overall height		1,390 mm
Wheelbase		1,710 mm
Underclearance		150 mm
Center height of drawbar		450 mm
Unladen weight		4,140 kg
Unladen weight		11,550 mm
Overall Extended Height with backrest		4,850 mm
ENGINE & SPEED		
Engine Type		Diesel engine
Engine Power		65 HP (48.5 kW)
Maximum Travel Speed	Forward	30 km/h
	Reverse	11 km/h
Gradability	Forward	46 %
		34 %



NOTES:

- The above Towing tractors Names are as per the Manufacturers sizes.
- The Towed weight capacities are at dry even concrete surfaces. The towing capacity will reduce when going up steep gradients.

KINGDOM OF BAHRAIN

CONTACT DETAILS

ACCESS PLATFORMS

+973-1770 8177, 1770 8170

FORKLIFTS

+973-1770 8177, 1770 5052

GENERATORS AND COMPRESSORS

+973-1770 8168, 1770 5059

HEAVY EQUIPMENT

+973-1770 8177, 1770 8170

LIGHT EQUIPMENT

+973-1770 8168, 1770 5059

FORMWORK AND SCAFFOLDING

+973-1770 8168, 1770 5059

PORTABLE CABINS

+973-1770 8168, 1770 5059

RAW MATERIALS

+973-1770 5085, 1770 8173

SKIPS

+973-1770 5085, 3979 7404

TRANSPORTATION AND LOGISTICS

+973-1770 8177, 1770 8168

QUALITY USED EQUIPMENT FOR SALE

+973-3975 7554, 1770 8173, 3656 6144,

+966 55 888 4575

مملكة البحرين

بيانات الاتصال

الرافعات الشخصية المتنقلة

+973-1770 8177, 1770 8170

الرافعات الشوكية

+973-1770 8177, 1770 5052

المولدات الكهربائية والضواغط

+973-1770 8168, 1770 5059

المعدات الثقيلة

+973-1770 8177, 1770 8170

المعدات الخفيفة

+973-1770 8168, 1770 5059

القوالب والسقالات

+973-1770 8168, 1770 5059

كباين متنقلة

+973-1770 8168, 1770 5059

المواد الخام

+973-1770 5085, 1770 8173

حاويات الأنقاض

+973-1770 5085, 3979 7404

النقل والخدمات اللوجستية

+973-1770 8177, 1770 8168

بيع المعدات المستعملة الممتازة

+973-3975 7554, 1770 8173, 3656 6144,

+966 55 888 4575



BAHRAIN BRANCHES

Ma'ameer

Tel: +973 1770 5059, 1770 8168

Fax: +973 1770 0086

Location: Bldg. 541, Rd.3417 Blk. 634, Maameer

Industrial Area

GPS Map: 26.1267, 50.6050

Manama

Tel: +973 1724 0166

Fax: +973 1724 0155

Location: Shop 313, R. 336, Bll. 311, Manama

GPS Map: 26.2226, 50.5711

Hidd

Tel: +973 1734 5020, 1770 5057

Location Bldg. 620 B, Rd 106, Blk. HIDD 101

GPS (map) 26.2562, 50. 6698


Ras Zuwayed

Tel: +973 1770 6019, +973 1770 8177

Fax: +973 1770 3050

Location: Bldg. 49, Ave. 52, Blk. 952, Ras Zuwayed

GPS Map: 26.0792, 50.6238

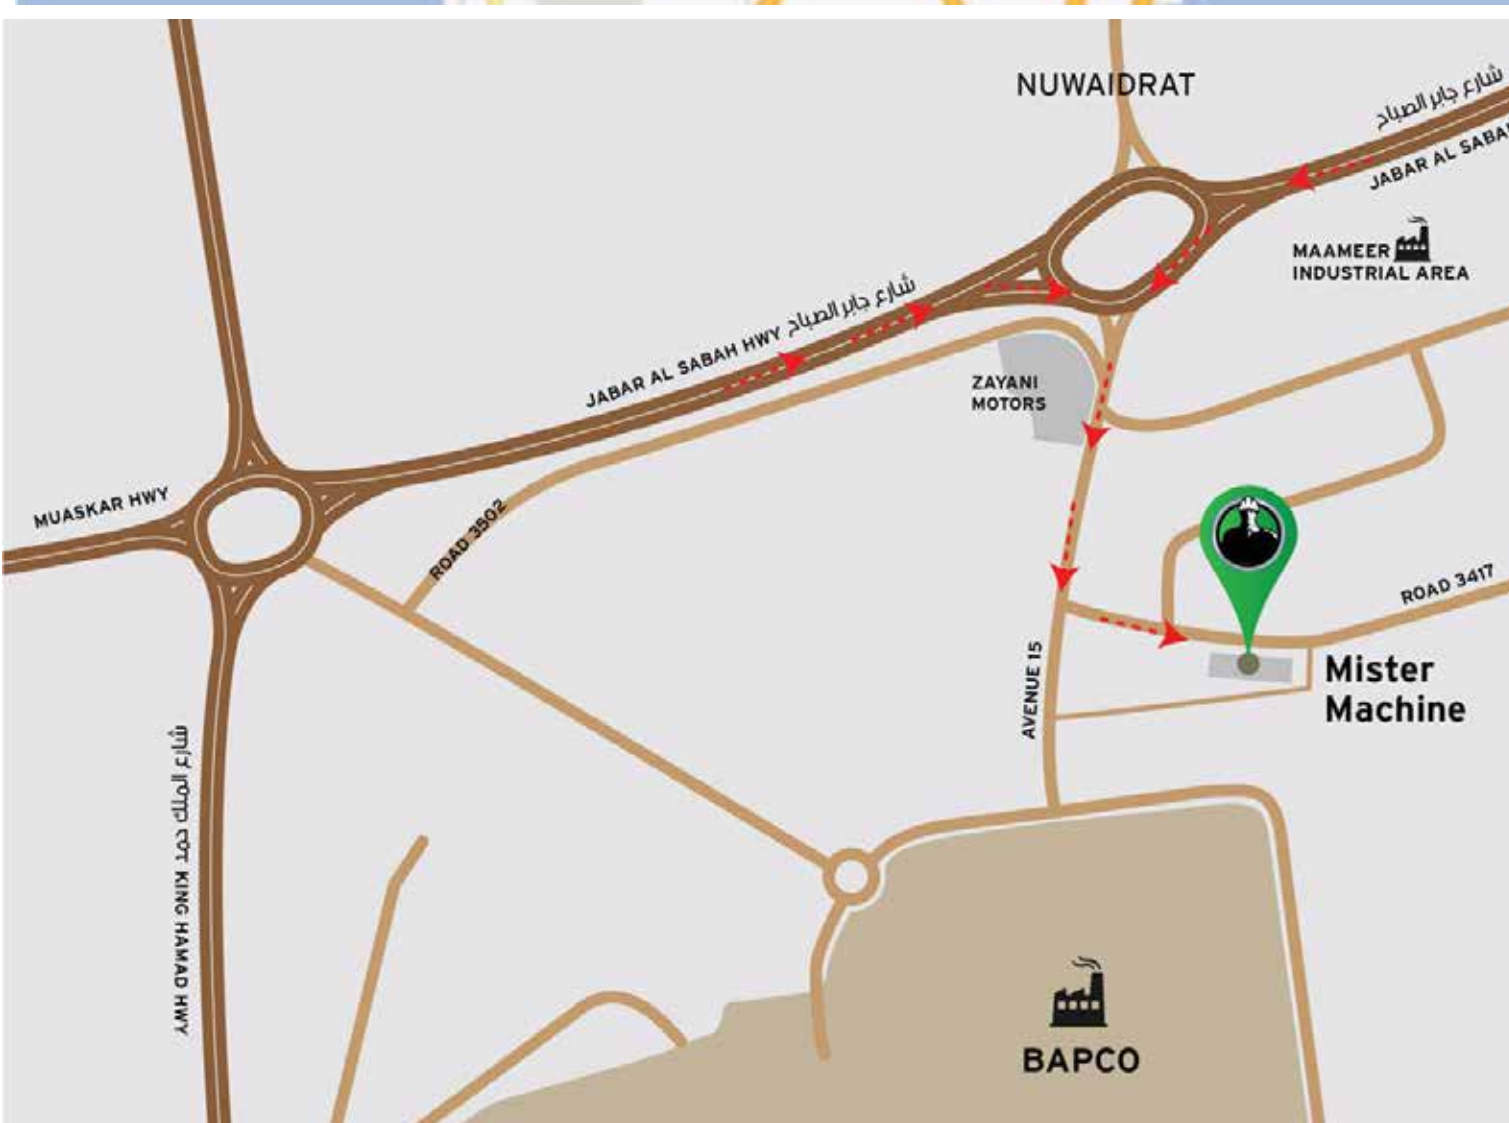

EQUIPMENT DIVISIONS (AWAL)

ACCESS PLATFORMS

- Articulated Boom Lifts/ Man Lifts
- Telescopic Boom Lifts/ Man Lifts
- Scissor Lifts (Diesel/ Battery)

FORKLIFTS DIVISION

- Forklifts (Diesel/ Battery/ LPG).
- Powered Stackers.
- Reach trucks.
- Telescopic handlers (Loadall).
- Towing Tractors.
- Pallet Trucks (Battery/ Manual)

GENERATORS AND COMPRESSORS

- Generators (1 Phase/ 3 Phase)
- Air Compressors (Diesel/ Electric)
- Portable Fuel Tanks
- Lighting Towers
- Welding Generators
- General Accessories
 1. Drip Trays.
 2. Offshore Frames.
 3. Portable fuel tanks.
 4. Spark Arrestors.
 5. Trailers.



HEAVY EQUIPMENT

- Tandem and double drum rollers
- Truck Cranes (Boom Trucks)
- Trucks, Flat-deck, and Low-bed trailers

OILFIELD EQUIPMENT DIVISION (Aramco Certified)

- Air compressors
- Air Compressors With Offshore Frame
- Electricity Generators
- Electricity Generators With Offshore Frame
- Lighting Towers
- Forklift Diesel
- Forklift- Battery- Onshore & Offshore
- Man Lifts & Scissor Lifts
- Other equipment

LIGHT EQUIPMENT

- Cleaning and Cutting Equipment
- Electric Power Tools
- Fixing Tools
- Ladders and Lifting Equipment
- Compactor Plates and Concrete Vibrators
- Painting and Decorating Equipment
- Plumbing Equipment
- Rebar Bending and Cutting Equipment
- Water Pumps and Welding Equipment

TRANSPORTATION AND LOGISTICS DIVISION

- TRANSPORT OF EQUIPMENT, AND GENERAL CARGO.

QUALITY USED EQUIPMENT

- Sale of Used Power Tools, Generators, Compressors, Forklifts, Heavy Equipment, Skips, etc.

أقسام المعدات (اوال)

الرافعات الشخصية المتنقلة

- رافعات سلة مفصّلية
- رافعات سلة تلسكوبية
- الرافعات المقصية (ديزل/ بطارية)

الرافعات الشوكية

- الرافعات الشوكية (ديزل، بطارية، غاز)
- رافعة شوكية مكّس (البليت ستاكر)
- رفعات المخازن الشوكية
- رافعات المناولة التلسكوبية
- جرار السحب
- رافعة طبليات (يدوية، كهربائية)

المولدات والضغوطات

- مولدات كهربائية 1 فيز، 3 فيز
- ضغوطات الهواء (ديزل/ كهربائية)
- خزانات ديزل متنقلة
- أبراج الانارة
- مولدات اللحام
- إضافات عامة
 1. صينية بالتنقيط.
 2. إطارات بحرية.
 3. خزانات الديزل المتنقلة.
 4. مانع الشرار.
 5. المقطورات.

المعدات الثقيلة

- معدات دك التربة (مداحل)
- الرافعات المتنقلة
- معدات الحفر والنقل الثقيلة
- الشاحنات ، والمقطورات ذات السطح المسطح ، والمقطورات منخفضة السرير

قسم معدات حقول النفط

- ضواغط هواء
- ضواغط هواء بإطار بحري
- مولدات كهرباء
- مولدات كهرباء بإطار بحري
- أبراج إنارة
- رافعة شوكية ديزل
- رافعة شوكية بطارية – على اليابسة و في البحر
- رافعات شخصية، و رافعات مقصية
- معدات أخرى

المعدات الخفيفة

- معدات التنظيف، معدات التقطيع
- المعدات الكهربائية
- أدوات التصليح
- السلالم – معدات الرفع
- المعدات الداكة وهزازة الكونكريت
- معدات الصباغة والديكور
- معدات السباكة
- معدات تقويس وتقطيع حديد التسليح
- مضخات المياه – معدات اللحام

النقلات والخدمات اللوجستية

- نقل المعدات الثقيلة، وجميع أنواع البضائع
- نقل الدفان البري

بيع المعدات المستعملة الممتازة

- بيع معدات كهربائية، رافعات شخصية، مولدات كهرباء، كمبريسرات، رافعات شوكية، معدات ثقيلة، حاويات الأنقاض، إلخ